



## Improved Bandwidth Enhancement in Star Patch Antenna

A. Sanjeevi Kumar\*  
Research Scholar,  
CMJ University, India

Dr.A. Rajalingam  
Professor,  
Saveetha Engineering College, India

**Abstract**— A star shaped microstrip patch with corners shaped and fed by a rectangular patch showed a bandwidth of around 63%. In this paper, a wideband microstrip antenna in the shape of a novel star shaped patch loaded with shorting posts and capacitive fed by a small diamond shaped patch is presented. The dimension of the patch and the parameters of the shorting posts are optimized to obtain an efficient design leading to the highest possible impedance bandwidth in the range of 4 to 8.8 GHz, i.e., 81% of the centre frequency.


**Keywords**— :DGS, Star Patch Antenna, microstrip

### I. INTRODUCTION

Conventional microstrip antennas in general have a conducting patch printed on a grounded microwave substrate, and have the attractive features of low profile, light weight, easy fabrication, and conformability to mounting hosts. However, microstrip antennas inherently have a narrow bandwidth and bandwidth enhancement is usually demanded for practical applications [1]. In addition, applications in present-day mobile communication systems usually require smaller antenna size in order to meet the miniaturization requirements of mobile units. Thus, bandwidth enhancement and size reduction are becoming major design considerations for practical applications of microstrip antennas. Many techniques such as meandered ground plane, slot-loading, stacked shorted patch, feed modification, chip loading and teardrop dipole in an open sleeve structure have been reported to achieve wideband and to reduce the size of microstrip antennas. In addition, the bandwidth of the patch antenna can be increased by using air substrates. Another method of increasing the impedance bandwidth of a patch antenna is to use shorting posts between the patch and the ground plane [2][7]. The performance of such structures depend on parameters such as the number of the posts used, the radius of each post and the height of the posts (the thickness of the substrate).

### II. ANTENNA GEOMETRY

Figure 1 shows the process of building the new star shaped patch antenna. The proposed antenna shape is based on a hexagonal patch in which 6 smaller hexagonal are cut from the edges [3][8]. To increase the bandwidth of the antenna four shorting posts are added under the patch. The antenna is capacitive fed by a diamond shape patch that is connected to a coaxial feed. Figure 2 shows the geometry of the complete antenna. The star-shaped patch is separated from the ground plane with an air-filled substrate. The specification of the proposed antenna is present in Table 1.

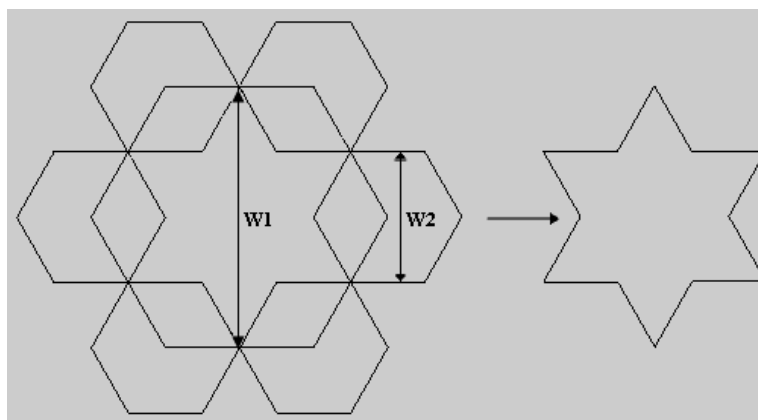

**Figure 1.** Process of building the star shaped patch antenna.

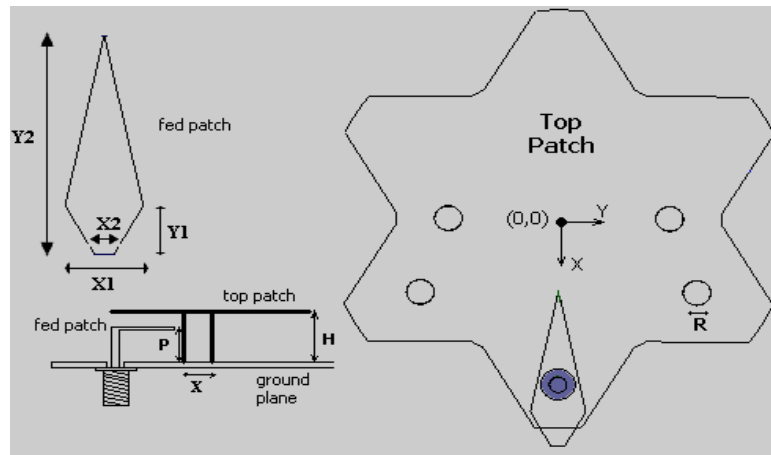


Figure 2. Geometry of proposed antenna with the diamond shaped feed patch.

Table 1. Specification of the proposed antenna in mm.

W1	W2	P	H	X	X1	X2	Y1	Y2	R
23.5	11.5	5	8	5.7	4.5	2	4	8	1.5

### III. RESULTS AND DISCUSSIONS

The antenna performance has been investigated through simulation via a Finite Element program, HFSS. The simulated result for the return loss is shown in Figure 1.3. Based on a  $-10$  dB return loss, 81% impedance bandwidth (in the frequency range of 4 to 8.8 GHz) is obtained. It has to be mentioned that various shapes of the feed patch were used (circular, rectangular ...) but through simulation it was found that the present diamond shape patch gives the best impedance bandwidth result.

Through simulation it has been noticed that two of the most important parameters that affects the bandwidth performance of the antenna are W 1, the star shaped patch diameter, and R, the diameter of the posts. Small variations on the rest of the parameters of the antenna do not significantly affect the antenna performance. Variation of return loss against slight changes on W 1 from 22 to 23 mm is shown in Figure 4. It is noticed that the highest bandwidth is achievable when W 1 is equal to 22 mm leading to 81% impedance bandwidth. Figure 5 shows the return loss with and without the posts [4]. From this figure it is obvious that without posts, we have 23% of bandwidth. When the posts are added to the structure, the percentage of bandwidth increases. For diameter of the posts, R, equal to 1.5 mm


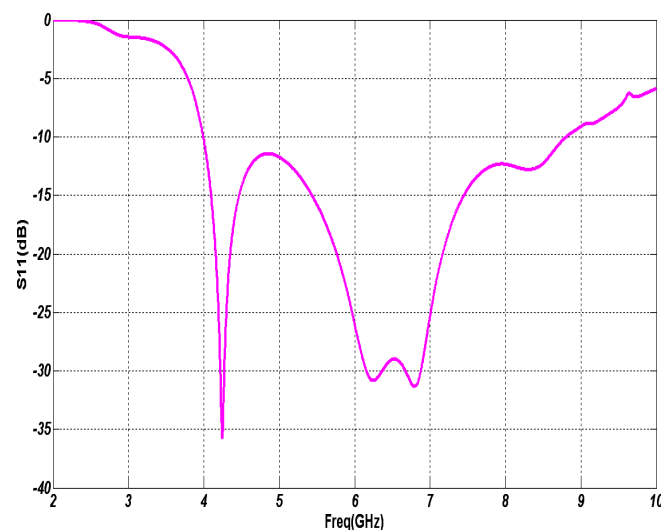



Figure 3. Return loss of the proposed antenna. W 1 = 22 mm, W 2 = 11.5 mm, P = 5 mm, H = 8 mm, X = 5.7 mm, X1 = 4.5 mm, X2 = 2 mm, Y 1 = 4 mm, Y 2 = 8 mm and R = 1.5 mm.

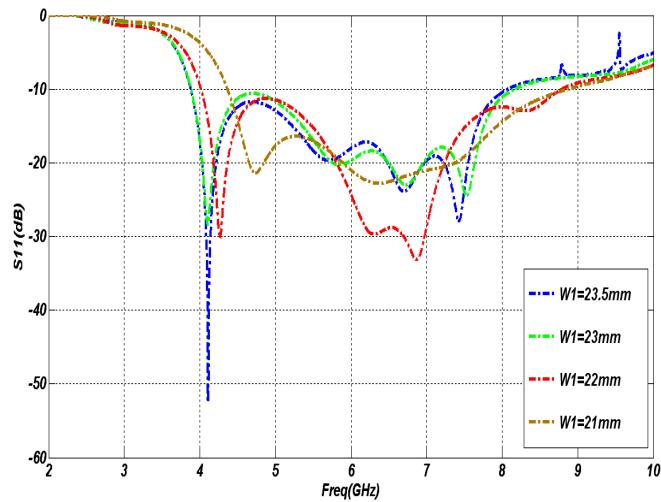


**Figure 4.** The Return loss of the antenna for various values of patch diameter,  $W_1$ .  $W_2 = 11.5$  mm,  $P = 5$  mm,  $H = 8$  mm,  $X = 5.7$  mm,  $X_1 = 4.5$  mm,  $X_2 = 2$  mm,  $Y_1 = 4$  mm,  $Y_2 = 8$  mm and  $R = 1.5$  mm.

The bandwidth is 81%, while for diameter of 1 mm the bandwidth reduces to 73%. To confirm the simulation results of Figure 3 which obtained through HFSS method, a second powerful computer package of CST has also been used Figure 6 shows the comparison of S11 of this antenna with HFSS and CST.

For the structure shown in Figure 2, the simulation of the radiation pattern over the frequency range of 4 to 8.8 GHz has also been done. Figure 7 Shows the simulated E- and H-plane patterns at 4, 6 and 8 GHz including both Co- and Cross-polarizations [5][6].

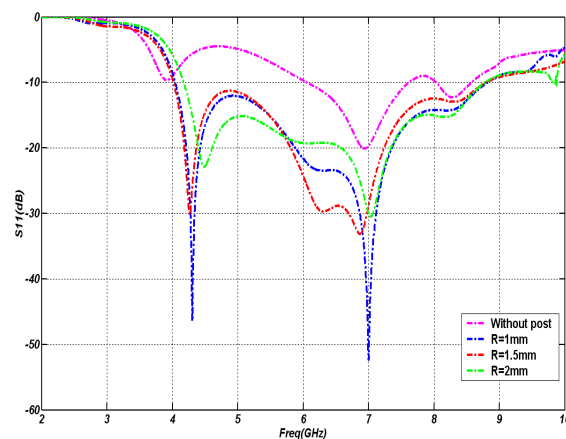

**Figure 5.** Return Loss of the antenna for various diameters of the posts.  $W_1 = 22$  mm,  $W_2 = 11.5$  mm,  $P = 5$  mm,  $H = 8$  mm,  $X = 5.7$  mm,  $X_1 = 4.5$  mm,  $X_2 = 2$  mm,  $Y_1 = 4$  mm,  $Y_2 = 8$  mm.

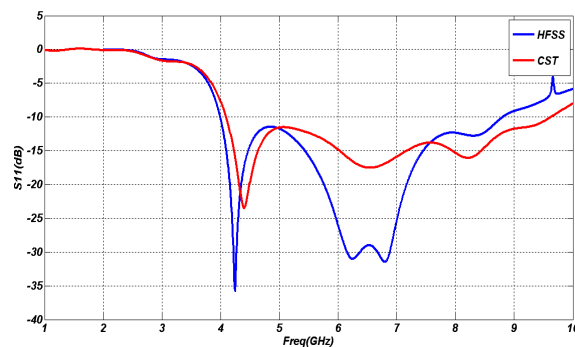

**Figure 6.** Comparison of the S11 obtained through HFSS and CST.  $W_1 = 22$  mm,  $W_2 = 11.5$  mm,  $P = 5$  mm,  $H = 8$  mm,  $X = 5.7$  mm,  $X_1 = 4.5$  mm,  $X_2 = 2$  mm,  $Y_1 = 4$  mm,  $Y_2 = 8$  mm and  $R = 1.5$  mm.

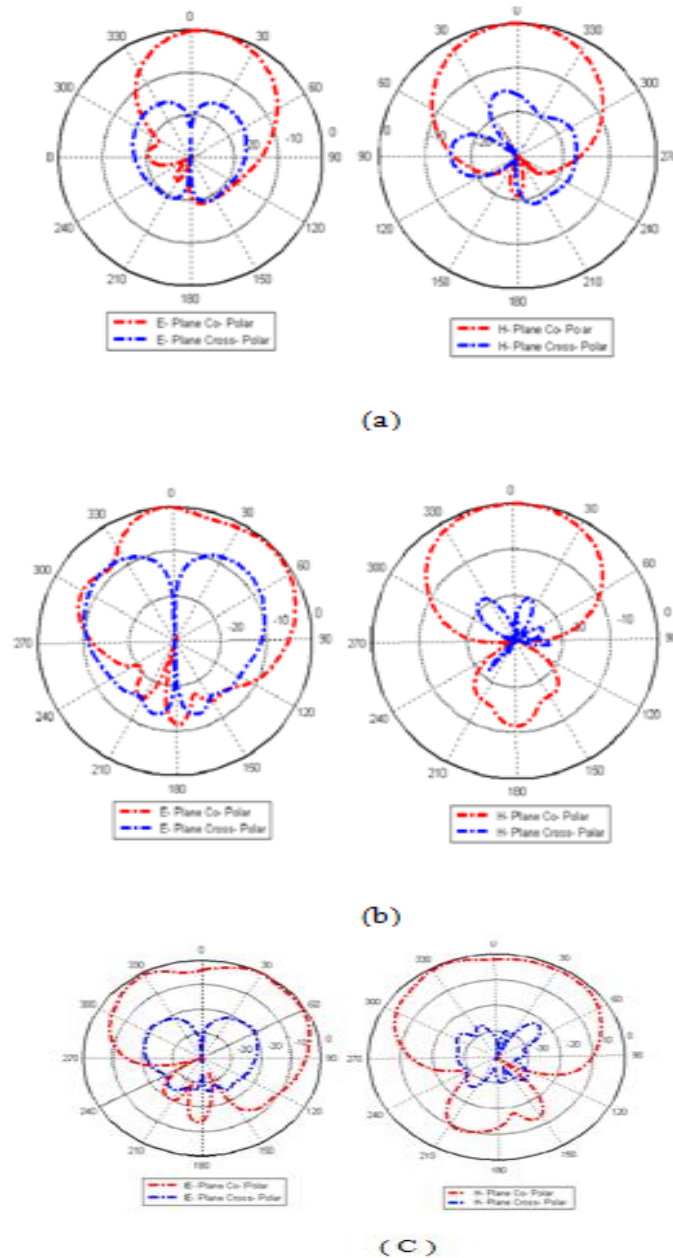


Figure 7. E & H-plane radiation pattern (a) at 4 GHz, (b) at 6 GHz, (c) at 8 GHz.

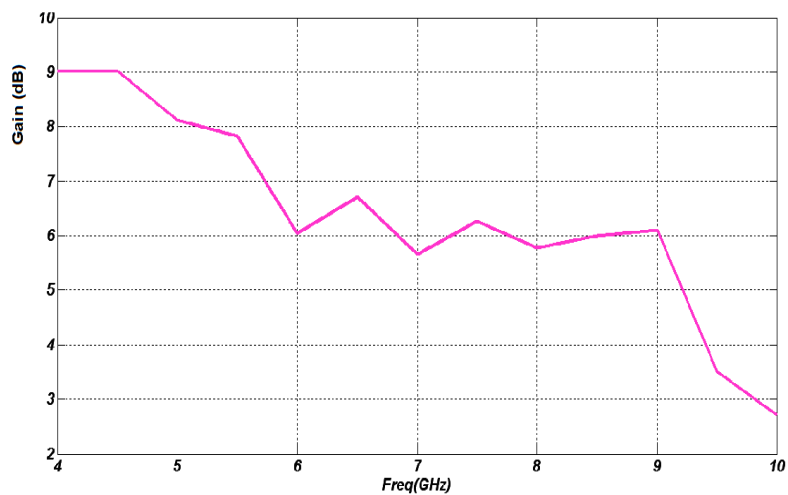


Figure 8. Gain of the proposed antenna at various frequencies.

Figure 8 shows the antenna gain over the entire frequency range from 4 GHz to 10 GHz. A novel wideband and

small size star-shaped microstrip antenna including simple feed structure is presented. The proposed antenna has a 81% bandwidth over the frequencies 4–8.8 GHz. It has good cross polarization level and uniform H-plane pattern over the wireless communication band. It has more bandwidth and has a smaller surface area than similar designs reported in the literature.

#### IV. CONCLUSION

A novel wideband and small size star-shaped microstrip antenna including simple feed structure is presented. The proposed antenna has a 81% bandwidth over the frequencies 4–8.8 GHz. It has good cross polarization level and uniform H-plane pattern over the wireless communication band. It has more bandwidth and has a smaller surface area than similar designs reported in the literature.

#### References

- [1] Rahardio.E.T., F.Y. Sulkily and M.Martin, “ Design of circularly polarized equilateral triangular microstrip antenna array for satellite communication “, Proc. of internat Symp. On antenna and propagation.(ISAP), Niigata, Japan, Aug.2007.
- [2] Zainud-Deen, S. H., M. F. Badr, E. El-Deen, K. H. Awadalla, and H. A. Sharshar, “Microstrip antenna with defected ground plane structure as a sensor for landmines detection,” *Progress In Electromagnetics Research B*, Vol. 4, 27–39, 2008.
- [3] Salehi, M., A. Motevasselian, A. Tavakoli, and T. Heidari, “Mutual coupling reduction of microstrip antennas using defected ground structure,” *10th IEEE International Conference on Communication Systems (ICCS)*, 1–5, Oct. 2006.
- [4] Tamasi Moyra, Susanta Kumar Parui and Santanu Das “Application of a Defected Ground Structure and Alternative Transmission Line for Designing a Quasi-elliptic Lowpass Filter and Reduction of Insertion Loss” *International Journal of RF and Microwave Computer-Aided Engineering* , Vol.-20, No.-6, PP-882-888 November 2010. Design and Development of Lowpass Filter and Harmonics Reduction
- [5] Susanta Kumar Parui, Santanu Das ‘An asymmetric defected ground structure with elliptical response and its application as a lowpass filter’ *Int. J. Electron. Commun. (AEÜ)* vol. 63, pp.483 – 490, 2009.
- [6] S. Haider, Project Report Part 4, “Microstrip Patch Antennas for Broadband Indoor Wireless Systems”, Department of Electrical and computer Engineering, University of Auckland, 2003.
- [7] Yang, L., Z. Feng, F. Chen, and M. Fan, “A novel compact EBG structure and its application in microstrip antenna arrays,” *IEEE MTT-S Digest*, 1635–1638, 2004.
- [8] Eldek, A.A., A.Z.Elsherbeni, and C.E.Smith, “Characteristics of BOW-TIE slot antenna with tapered tuning stubs for wideband operation,” *Progress In Electromagnetics Research*, PIER 49, 53–69, 2004.