



Survey on MANET Routing Protocol and proposed Multipath Extension in AODV

Simmi Jain, Prof.Hitesh Gupta, Prof.Mukesh Kumar Baghel
Patel college of Science and Technology
RGPV, Bhopal
India

Abstract— MANET is a self-organized, decentralized wireless network with mobility as core functionality. Routing is key in to enhance MANET performance. Routing in mobile ad hoc networks and some fixed wireless networks use multiple-hop routing. Routing protocols for this kind of wireless network should be able to maintain paths to other nodes and in most cases, must handle changes in paths due to mobility. AODV [27] [28] is most popular routing protocol among others. It is On-demand type routing protocol and its performance is better than other routing protocols in MANET environment. This paper focus on AODV routing protocol to enhanced the break avoidance mechanism using multipath extension in core AODV to avoid route break problem in existing AODV method.

Keywords— AODV, MAODV, Multipath AOD

I. INTRODUCTION

MANET is a self-organized, decentralized wireless network with mobility as core functionality. The network is ad hoc because it is built spontaneously as devices are connected, and so the determination of which nodes forward data is made dynamically based on the network connectivity. This is in contrary to wired networks where routers perform the task of routing. It is also different from managed (infrastructure) wireless networks, in which a special node known as an access point manages communication among other nodes.

In modern era, there is a tremendous growth in the sales of Communication with computation capability devices such as Laptop, mobile, portable computers etc. Recently many network researchers are studying networks based on new communication techniques, especially wireless communications. Wireless networks allow hosts to travel without the constraints of wired connections. Hosts and routers in a wireless network can move around. Therefore, the network topology can be dynamic and unpredictable. Traditional routing protocols used for wired networks cannot be directly applied to most wireless networks because some common assumptions are not valid in this kind of dynamic network. For example, one assumption is that a node can receive any broadcast message sent by others in the same subnet. However, this may not be true for nodes in a wireless mobile network. The bandwidth in this kind of network is

usually limited. Thus, this network model introduces great challenges for routing protocols. Generally speaking, traditional routing protocols that are used in wired networks can support routing in fixed wireless networks and mobile networks with fixed access points. Only one-hop routing is required over a link in a wireless network

with fixed access points and many fixed wireless network. Routing in

mobile ad hoc networks and some fixed wireless networks use multiple-hop routing. Routing protocols for this kind of wireless network should be able to maintain paths to other nodes and in most cases, must handle changes in paths due to mobility. Traditional routing cannot properly support routing in MANET. For this MANET uses different types of protocol such as DSR, DSDV, AODV, ZRP, AMRIS, and AM Route etc. Ad Hoc On- Demand Distance Vector Routing Protocol (AODV) is a routing protocol for mobile ad hoc networks. AODV [27] [28] is most popular routing protocol among others. It is On-demand type routing protocol and its performance is better than other routing protocols in MANET environment. This research paper focus on AODV routing protocol to enhanced the break avoidance mechanism. AODV is an Ondemand type routing protocol and most of on-demand routing protocols reestablish a new route after a route break will occur [29]. The simplest method to avoid route breaks each intermediate node on an active route sense danger link failure and notifies to an upstream node and re-builds a new route before a route break [30]. We proposed enhanced route maintenance and break avoidance. In this method we add new metrics (behavior) to existing [8] for better performance in high mobility environment. With the rapid proliferation of wireless networks and mobile computing applications, Quality of Service (QoS) for mobile ad hoc networks (MANETs) has received increased attention. Rest of the paper organized as follow, section two discuss the basic function of on demand routing protocol AODV and AOMDV, 3 told about related work and section 4 discuss the proposed approach using AOMDV based methods and finally section 6 give conclusion of this paper.

II. PAGE LAYOUT

Because radio range is usually limited and the network components may have some mobility, the topology of a wireless network can vary with time. According to the relative mobility of hosts and routers, there are three different types of wireless networks.

1. **Fixed wireless network.** Fixed hosts and routers use wireless channels to communicate with each other and form a fixed wireless network. An example is a wireless network formed by fixed network devices using directed antennas, as shown in Figure 1.

2. **Wireless network with fixed access points.** Mobile hosts use wireless channels to communicate with fixed access points, which may act as routers for those mobile hosts, to form a mobile network with fixed access points. An example is a number of mobile laptop users in a building that access fixed access points, as illustrated in Figure 2

3. **Mobile ad hoc network.** A mobile ad hoc network is formed by mobile hosts. Some of these mobile hosts are willing to forward packets for neighbors. Examples include vehicle-to-vehicle and ship-to-ship networks that communicate with each other by relying on peer-to-peer routings, as shown in Figure 3.

A MANET (Mobile Ad Hoc Network) consists of a collection of mobile nodes communicating in a multi-hop way without any fixed infrastructure. MANET has the following properties-

1. No fixed Infrastructure.
2. Decentralized.
3. Self configuration
4. Dynamic nature

There are different criteria for classifying routing protocols for wireless ad hoc networks. For example, what routing information is exchanged; when and how the routing information is exchanged, when and how routes are computed and so on [1]. Figure 1 show the MANET environment.

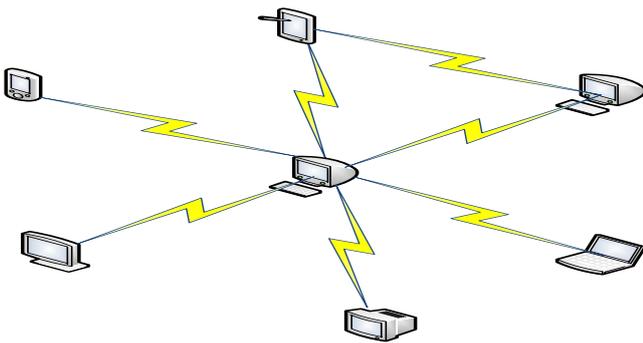


Figure 1. MANET

Pro-active (table-driven) routing

Pro-active protocols (or table-driven protocols) work in a way similar to wired networks: they try to maintain an up-to-date map of the network, by continuously evaluating known routes and attempting to discover new ones. This way, when a path to a destination is needed at a node, or a packet needs to be forwarded, the route is already known and there is no extra delay due to route discovery [2].

Reactive (on-demand) routing

Re-active protocols (on-demand protocols) only start a route discovery procedure when needed. When a route from a source to a destination is needed, some sort of global search procedure is started. This does not require the constant updates being sent through the network. . In some cases the desired route(s) are still in the route cache maintained by nodes. When this is the case there is no additional delay since routes do not have to be discovered.[2] It is the responsibility of the route request receiver node to reply back to the source node about the possible route to the destination. The source node uses this route for data transmission to the destination node.

Hybrid (both pro-active and reactive) routing

Hybrid protocols combine the advantages of both pro-active and re-active routing, by locally using pro-active routing and inter-locally using re-active routing. This is partly based on the assumption that most communication in mobile ad hoc networks takes place between nodes that are close to each other, and the assumption that changes in topology are only important if they happen in the vicinity of a node. When a link fails or a node disappears on the other side of the network, it has only effect on local neighborhoods, nodes on the other side of the network are not affected.[2]

The Ad Hoc On-Demand Distance Vector (AODV) [25], Routing Protocol is a reactive routing protocol. AODV is the use of a destination sequence number for each routing table entry. The sequence number is created by the destination node. Sequence numbers are used by other nodes to determine the freshness of routing information [3]. There are following Operation performs by AODV protocol. RREQ – Route request, RREP – Route reply, RERR – Route error

RREQ – Route Request: A RREQ message is broadcasted when a node needs to discover a route to a destination. When a route is not available for the destination, a route request packet (RREQ) is flooded throughout the network. The RREQ contains the following fields. Figure 2.1 shows the propagation of RREQ.

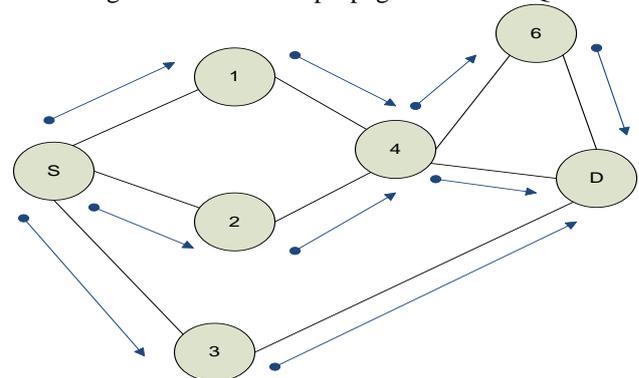


Figure 2.1 RREQ Propagation

The request ID is incremented each time the source node sends a new RREQ, so the pair (source address, request ID) identifies a RREQ uniquely. On receiving a RREQ message each node checks the source address and the request ID. If the node has already received a RREQ with the same pair of parameters the new RREQ packet will be discarded. Otherwise the RREQ will be either forwarded (broadcast) or replied (uni-cast) with a RREP message-

•If the node has no route entry for the destination or it has one but this is no more an up-to-date route, the RREQ will be rebroadcasted with incremented hop count.

•If the node has a route with a sequence number greater than or equal to that of RREQ, a RREP message will be generated and sent back to the source [5].

RREP – Route reply If a node is the destination, or has a valid route to the destination, it unicasts a route reply message (RREP) back to the source. This message has the following format [5].

If a node receives a route request for a destination, and either has a fresh enough route to satisfy the request or is itself the destination, the node generates a RREP message and unicasts it back to the source node[4]. Figure 2.2 show the route reply message (RREP) by destination D to source S.

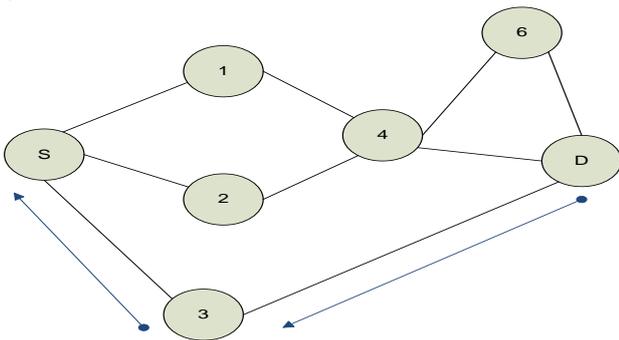


Figure 2.2 Propagation of RREP

RERR – Route error

All nodes monitor their own neighborhoods. When a node in an active route gets lost, a route error message (RERR) is generated to notify the other nodes on both sides of the link of the loss of this link [5].

RREP is forwarded to the source; the Hop Count field is incremented by one at each hop. A node initiates a RERR message in three situations

- If it detects a link break for the next hop of an active route in its routing table, or
- If it gets a data packet destined to a node for which it does not have an active route, or
- If it receives a RERR from a neighbor for one or more active routes

For cases (1) and (2)-

- The destination sequence numbers in the routing table for the unreachable destination(s) are incremented by one
- Then RERR is broadcast with the unreachable destination(s) and their incremented destination sequence number(s) included in the packet

For case (3), the node

- Updates the corresponding destination sequence # and invalidates the route for the destination [4]

Figure 2 show the working of RREQ and RREP of AODV protocol.

One advantage of AODV is that AODV is loop-free due to the destination sequence numbers associated with routes. The algorithm avoids the Bellman-Ford “count to infinity” problem [25]. Therefore, it offers quick convergence when the ad hoc network topology changes which, typically,

occurs when a node moves in the network [25]. Similar to DSR, poor scalability is a disadvantage of AODV [26].

III. PAGE STYLE

Routing is the process of selecting paths in a network along which to send network traffic. Guaranteeing delivery and the capability to handle dynamic connectivity are the most important issues for routing protocols in wireless mobile ad hoc networks. Once there is a path from the source to the destination for a certain period of time, the routing protocol should be able to deliver data via that path. If the connectivity of any two nodes changes and routes are affected by this change, the routing protocol should be able to recover if an alternate path exists. There are some other issues related to routing in wireless ad hoc networks. Whether to consider them depends on the specific environment or application. For example, overhead is particularly important in a wireless network with limited bandwidth [1, 2, 3, 4, 5, and 6]. Power consumption may also be a problem in an ad hoc network with battery-powered nodes [7, 8, 9, 10]. Quality of service may be required in an ad hoc network supporting delay sensitive applications such as video conferencing [11, 12, 13, 14]. A routing protocol may need to balance traffic based on the traffic load on links [15, 16]. Scalability of routing protocols is an important issue for large networks [17, 18]. The routing protocol may need to implement security to protect against attacks, such as sniffer, man-in-the-middle, or denial of service [19, 20, 21]. Routing protocols may rely on information based on other layers. For example, the Global Positioning System (GPS) can be used in wireless ad hoc networks deployed in battlefields or connecting vehicles [22, 23]. Mobility prediction can improve routing in wireless networks with known movement patterns, such as the IRIDIUM system satellite network [24].

Survey on Multipath AODV:

[29] The multipath routing technique is a preferred solution for sensor networks with objectives to achieve better energy efficiency and network robustness in case of node failures. In multipath node search more than route to destination (multipath) these multiple paths served many purpose such as either for reliable data delivery using alternate route, i.e., a node switches to an alternative path when the current path fails or simultaneously for load balancing by using several paths at the same time [2]. AODV [25] most popular protocol among MANET Routing scheme, lots of modification and enhancement had been applied on it for better performance since its development.

In AODV-BR [30] each neighboring node of the primary route maintains a backup route to the destination. When a link in the primary path fails, data packets are sent to a neighbor who salvages the packet and sends it to the destination. It is not really a multipath protocol in the sense that nodes only maintain one path per destination.

CHAMP [31] is a similar but more sophisticated protocol. Each node maintains multiple shortest loop-free paths to the destination. When a node can't forward a data packet the upstream node salvages the packets and sends them via an alternative route. Neither AODV-BR nor CHAMP considers path disjointness.

[32] The bigger challenge to provide QoS in MANET environments are dynamic variation of network topology, common and shared radio channel, limited resource availability (energy) and ad hoc nature. It is due to the nodes mobility results in continuously evolving new topologies and to the MANET nature. [33] To avoid frequent route discovery and maintaining QoS in MANET, various multipath routing protocols has been proposed based on the existing unicast path routing protocol in ad hoc networks. Ad hoc On-demand Multipath Distance Vector (AOMDV) [34] is one of extensions of Ad hoc On Distance Vector (AODV) [25].

To decrease route discovery rate in single path routing, some multipath routing protocols have been proposed to extend AODV [25], [30], [34] and [35]. However, [25] does not perform well by increasing the number of communication sessions. [4] Selects node-disjoint paths, and it only performs well with high density of mobile nodes. [34] Tries to find link-disjoint paths. But it cannot always find all of existing reverse paths.

[36] Proposed a new concept of multipath routing with load balancing capability based on periodical packet distribution rate control. Packet distribution rate of each route adapts to delay cost calculated by using channel utilization of base stations on this route.

Author of [37] modified to AODV-2T [38]. The major cause of link failures in Ad hoc wireless network is the dynamic movement of the mobile nodes themselves and the other might be battery running out. AODV-2T [38] is an improved AODV designed to compromise this problems by applying a conservative and circumspect concept. By investigating received RF signal and the battery power, AODV-2T could overcome the problem by preparing a backup route just-in-time before link breaking. This makes it is able to switch packet transmission to the backup route without any delay with a bit of additive overhead. Although AODV-2T performs rather well compared to the early proposed protocols in term of overhead and number of route break but AODV-2T is not capable to construct a multi-hop backup route. Then [37] add multi hop features on it and named it multi hop AODV-2T.

[38] Concluded that, in the scenarios where the network is loaded at a high density and average mobility, the contribution of the use of Multi-Path Routing Protocols is very impressive compared to conventional AODV and DSR Protocols which would result in poor performance of network in congestion, making the topology not reliable and low in capacity. Improved results from the simulation of high load and density networks versus low load and density networks for Multi-Path Routing Protocols allowing ease congestion, increasing reliability and network capacity by increasing the rate of Successfully Delivered Packets and the Total Throughput of the network. The only drawback of Multi-Path Routing Load Balancing Protocols such as AOMDV and MSR is the use of a large number of control packets for calculating and maintaining multiple routes between a source and destination but such disadvantage is minimized in the network conditions as the rate of control packets generated by MSR or AOMDV is slightly higher than the rate generated by the Single-Path protocols at high load and density nodes.

[39] Selection of route is determined by the metrics used in the routing protocol. Initial protocols use hop count as a primary metric [40] [41], although delay often implicitly impacts route choices [40]. More recent protocols suggest the use of extended metrics such as signal strength [42], stability [43] and load [44] [45], all of which impact performance and so implicitly impact energy consumption [46]. Energy can also be used explicitly to choose routes that minimize energy consumption [47] [48] or avoid nodes with limited energy resources [49] [50].

PROPOSED SOLUTION

Routes in AODV are maintained using periodic hello packets, similar to ackreq packets in DSR. When a critical number of hello packets are sent without a response, newly arrived traffic is stored in a temporary buffer while route repair operations are attempted. If these operations fail, the buffered traffic is discarded, and a RERR is sent to the source node.

The critical number of lost hello packets is a user-defined parameter which effectively controls how quickly the network fails broken routes. A small value will result in fast link breakage, and may add unnecessary route discovery traffic during periods of network congestion. A large value will cause noticeable service interruption as failed links are used until sufficient hello packets fail.

The innovative ideas to overcome the problems in case of routing in a wireless platform are key points that can potentially raise the throughput of the network in different scenarios. The protocols introduced by IEEE 802.11s draft are divided into Proactive, Reactive or Hybrid Mesh categories. One key popular protocol is called ad-hoc On Demand Vector (AODV) [25] protocol which is based on on-demand path selection in which the tree size is increasing in a Proactive manner. As competent, AOMDV [34] protocol focuses on Ad-hoc on demand Multi-Path Distance Vector routing challenging AODV in performance. In this synopsis, we proposed the and analyze the performance of AODV and want to add multipath capability on it.

This is very clear we are going to enhance the current AODV functionality to make it multipath. For this we will use NS-3.13 simulator as test bed and enhanced its AODV protocol to work as a multipath routing protocol for achieving better throughput and performance in highly dynamic MANET environment.

The research presented in this presentation involves the following: Enhancing the Ad hoc On-demand Multipath Distance Vector (AODV) routing protocol for MANETs to a delay-aware multi-path protocol. The focus area is to improve the QoS in MANETs by creating a protocol, which considers delay requests of real-time multimedia applications (voice and video) in making routing decisions.

- Our proposed work is mainly concentrate on improving QoS of AODV protocol using NS-3 test bed. In this section we proposed new scheme for load balancing in AOMDV routing protocol, for this we will divide our research in two sections-

- Choosing best paths to reduce Delay and Congestion- For this we will use following parameters to choose for selecting of best routes generated by RREP, resultant of RREQ.

- PDR (Packet Delivery Ratio) = (Number of packet dropped)/Total Number of incoming packets.
 - PMOR (Packet Modification Rate) = (Number of packets modified)/Total number of Incoming Packets.
 - PMIR (Packet Misroute Rate) = (Number of Packet misrouted)/Total Number of Incoming Packets.
 - These 3 parameters will decide best path to forward packets as well as we also decide the List of path for Load balancing and alternate path in case of failure of first selected path.
 - Identification of Selfish and Malicious Node for security-
 - The matrices discuss above (In section 1), we will used for checking the behavior of MANET Node's whether they are Selfish or Malicious Node
- The tools we will used for simulation of AODV protocol, is **ns-3.13** on **ubuntu11.10 platform**.

CONCLUSION

In this paper, we will survey on different reactive routing protocols of MANET . Like AODV, AOMDV and LBAOMDV. Then we proposed our solution to improve multipath functionality in pure AODV protocol that will help to improve the performance of routing protocol for selecting best route and identification of misbehaving nodes.

REFERENCES

- [1] P. Jacquet and L. Viennot, "Overhead in Mobile Ad-hoc Network Pro-tocols," Research Report-3965, INRIA, France, June 2000. Available at <http://ftp.inria.fr/INRIA/publication/publi-ps-pz/RR/RR-3965.pz.gz>.
- [2] R. V. Boppana and S. P. Konduru. "An adaptive distance vector routing algorithm for mobile, ad hoc networks," in Proc. of the 2001 IEEE INFOCOM and Joint Conference of the Computer and Communications Societies, 2001, vol. 3 , pp. 1753-1762.
- [3] T. Goff, N. B. Abu-Ghazaleh, D. S. Phatak, and R. Kahvecioglu, "Preemptive routing in ad hoc networks," in Proc. of the Seventh International Conference on Mobile Comput-ing and Networking, 2001, pp. 43-52.
- [4] N. J. Zhou and A. A. Abouzeid, "Information-theoretic lower bounds on the routing overhead in mobile ad-hoc networks," in Proc. of IEEE International Symposium on Information Theory, 2003, pp. 455-455
- [5] J. Yoo, S. Choi, and C. Kim, "Control overhead reduction for neighbour knowledge acquisition in mobile ad hoc networks," in Electronics Letters, vol. 39, issue 9, pp.740-741, 2003.
- [6] D. Kim, C. K. Toh J.-C. Cano, and P. Manzoni, "A bounding algorithm for the broad-cast storm problem in mobile ad hoc networks," in Proc. of Wireless Communications and Networking Conference (WCNC), vol. 2, pp. 1131-1136, 2003.
- [7] C. E. Jones, K. M. Sivalingam, P. Agrawal, and J. C. Chen, "A survey of energy effi-cient network protocols for wireless networks," in Wireless Networks, vol. 7, no. 4, pp.343-358, 2001.
- [8] J. H. Chang and L. Tassiulas, "Energy conserving routing in wireless ad-hoc net-works," in Proc. of 19th INFOCOM, pp. 22-31, 2000.
- [9] A. Helmy, "Architectural framework for large-scale multicast in mobile ad hoc net-works," in Proc. of IEEE International Conference on Communications (ICC) 2002, vol. 4,pp. 2036-2042,2002
- [10] D. D. Perkins, H. D. Hughes, and C. B. Owen, "Factors affecting the performance of ad hoc networks," in Proc. of IEEE International Conference on Communications' (ICC) 2002, vol. 4, pp. 2048-2052, 2002.
- [11] T. W. Chen, "Efficient Routing and Quality of Service Support for Ad Hoc Wireless Networks." Ph.D. dissertation, University of California, Los Angeles, Department of Computer Science, March 1998. Available at <http://citeseer.nj.nec.com/52768.html>.
- [12] J. C. Liu, Q. Zhang, W. W. Zhu, J. Zhang, and B. Li, "A novel framework for QoS-aware resource discovery in mobile ad hoc networks," in Proc. of IEEE International Conference on Communications (ICC) 2002, vol. 2, pp. 1011-1016, 2002.
- [13] O. Hussein and T. Saadawi, "Ant routing algorithm for mobile ad-hoc networks (ARAMA)," in Proc. of International Conference on Performance, Computing, and Com-munications Conference (IPCCC), pp. 281-290, 2003.
- [14] C. H. Yeh and T. T. You, "A QoS MAC protocol for differentiated service in mobile adhoc networks," in Proc. of International Conference on Parallel Processing, pp. 349-356,2003
- [15] A. Zhou and H. Hassanein, "Load-balanced wireless ad hoc routing,"in Proc. of Cana-dian Conference on Electrical and Computer Engineering, vol. 2 , 2001, pp. 1157-1161.
- [16] J. H. Song, V. Wong, and V. C. M. Leung, "Load-aware on-demand routing (laor) pro-tocol for mobile ad hoc networks," in Proc. of Vehicular Technology Conference (VTC) Spring 2003, vol. 3, pp. 1753-1757, 2003.
- [17] I. D. Aron and S. K. S. Gupta, "On the scalability of on-demand routing protocols for
- [18] mobile ad hoc networks: an analytical study," in Journal of Interconnection Networks,vol. 2, no. 1, pp. 5-29, 2001.
- [19] C. A. Santivanez, B. McDonald, I. Stavrakakis, and R. Ramanathan, "On the scala-bility of ad hoc routing protocols," in Proc. of INFOCOM 2002, vol. 3, pp. 1688-1697,2002.
- [20] J. Lundberg, "Routing Security in Ad Hoc Networks," Helsinki University of Tech-nology, 2000. Available at <http://citeseer.nj.nec.com/400961.html>.
- [21] S. Capkun, J. P. Hubaux, and L. Buttyan, "Mobility helps security in ad hoc net-works," in Proc. of the 4th ACM international symposium on Mobile ad hoc networking and computing, pp. 46-56, 2003.

- [22] Y. G. Zhang, W. K. Lee, and Y. A. Huang, "Intrusion detection techniques for mobile wireless networks," in *Wireless Networks*, vol. 9, issue 5, pp. 545-556, 2003.
- [23] L. Qin, "Pro-Active Route Maintenance In DSR," M.S. thesis, Ottawa-Carleton Institute of Computer Science, School of Computer Science, Carleton University, Canada, 2001. Available at <http://citeseer.nj.nec.com/qin01proactive.html>.
- [24] A. Boukerche and S. Rogers, "GPS query optimization in mobile and wireless networks," in *Proc. of the 6th IEEE Computers and Communications Conference*, pp. 198-203, 2001.
- [25] C. E. Perkins, E. M. Belding-Royer, and S. R. Das, "Ad hoc On-Demand Distance Vector (AODV) routing," Internet Engineering Task Force (IETF) draft, November 2002. Available at <http://www.ietf.org/internet-drafts/draft-ietf-manet-aodv-12.txt>.
- [26] I. D. Aron and S. K. S. Gupta, "On the scalability of on-demand routing protocols for mobile ad hoc networks: an analytical study," in *Journal of Interconnection Networks*, vol. 2, no. 1, pp. 5-29, 2001.
- [27] AODV, "Ad-hoc On-demand Distance Vector Routing", RFC 3561.
- [28] C.E. Perkins, and E.M. Royer, Ad-hoc On-demand Distance Vector Routing, in: *Proceedings of the 2th IEEE Workshop on Mobile Computing Systems and Applications*, New Orleans, LA, February 1999, pp.90-100.
- [29] Nawel BENDIMERAD and Bouabdellah KECHAR "Performance evaluation of QoS aware Multipath extensions For the Dynamic MANET On-demand protocol in Wireless Sensor Networks", IEEE, 2011.
- [30] Sung-Ju Lee and Mario Gerla, "AODV-BR: Backup Routing in Ad hoc Networks," in *Proceedings of the IEEE Wireless Communications and Networking Conference (WCNC 2000)*, Chicago, IL, September 2000.
- [31] Alvin Valera, Winston Seah, and S.V. Rao, "Cooperative Packet Caching and Shortest Multipath Routing In Mobile Ad hoc Networks," in *IEEE INFOCOM*, 2003.
- [32] Salim Bitam, Mohamed Batouche, and Abdelhamid Mellouk "QoS BeeManet: a new QoS multipath routing protocol for mobile ad-hoc networks", *IEEE Globecom 2010 Workshop on Towards Smart Communications and Network technologies applied on Autonomous Systems*, 2010.
- [33] YuHua Yuan, HuiMin Chen, and Min Jia "An Optimized Ad-hoc On-demand Multipath Distance Vector(AOMDV) Routing Protocol", *IEEE, Asia-Pacific Conference on Communications*, Perth, Western Australia, 3 - 5 October 2005.
- [34] Marina, M. K. and Das, S. R., "On-demand Multipath Distance Vector Routing for Ad Hoc Networks," *Proc. of 9th IEEE Int. Conf. On Network Protocols*, pp.14-23 (2001).
- [35] Li, X. F. and Cuthbert, L., "On-demand Node-disjoint Multipath Routing in Wireless Ad hoc Networks," *Proc. of the 29th Annual IEEE International Conference on Local Computer Networks (LCN'04)*.
- [36] Hiroaki Morino, Hiroyuki Kawamura, Masugi Inoue and Tohru Sanefuji "Load-balanced multipath routing for wireless mesh networks: A step by step rate control approach", *Autonomous Decentralized Systems, ISADS '09. International Symposium on, IEEE*, 2009.
- [37] Harisavan Somnuk and Mayuree Lertwatechakul "Multi-hop AODV-2T", *International Symposium on Intelligent Ubiquitous Computing and Education, IEEE*, 2009.
- [38] Pedram Ghahremanloo "Multi-Path Routing Challenging Single-Path Routing in Wireless Mesh Networks: Network Modeling of AODV and AOMDV", *Wireless Advance, IEEE*, 2011.
- [39] Mohamed Tekaya, Nabil Tabbane and Sami Tabbane "Delay Remaining Energy for AOMDV Protocol (DRE-AOMDV)", *IEEE*, 2011.
- [40] Ducksoo Shin, Jonghyup Lee, Jaesung Kim, Jooseok, "A2OMDV : An adaptive ad hoc on-demand multipath distance vector routing protocol using dynamic route switching, *Journal of Engineering Science and Technology* Vol. 4, No. 2 (2009) 171 - 183.
- [41] Yusuke Sakurai, Jiro Katto, AODV Multipath Extension using Source Route Lists with Optimized Route Establishment, *International workshop on wireless ad hoc networks (IWWAN) 2004*.
- [42] Sujata V. Mallapur, Sujata .Terdal, Enhanced Ad-Hoc on Demand Multipath Distance Vector Routing Protocol (EAOMDV), (IJCSIS) *International Journal of Computer Science and Information Security*, Vol. 7, No. 3, March 2010.
- [43] Shuchita Upadhyaya, Charu Gandhi, "QoS routing using link and node stability in mobile ad hoc networks", *Journal of Theoretical and Applied Information Technology*, 2005 - 2009 JATIT.
- [44] R. Vinod Kumar, R.S.D. Wahida Banu, Load-balancing Approach for AOMDV in Ad-hoc Networks, *IJCA Special Issue on "Mobile Ad-hoc Networks" MANETs*, 2010
- [45] M. Tekaya, N. Tabbane, S. Tabbane "Multipath Routing Mechanism with Load Balancing in Ad hoc Network.", *6th International Conference on Computer Engineering and Systems (ICCES'10)*, Cairo, Egypt, 2010.
- [46] Natarajan Meghanathan, Energy Consumption Analysis of the Stable Path and Minimum Hop Path Routing Strategies for Mobile Ad hoc Networks, *IJCSNS International Journal of Computer Science and Network Security*, VOL.7 No.10, October 2007
- [47] Getsy S Sara, Neelavathy Pari.S, Sridharan, Energy Efficient Ad Hoc On Demand Multipath Distance Vector Routing Protocol, *International Journal of*

Recent Trends in Engineering, Vol 2, No. 3, November 2009.

- [48] Niranjana Kumar Ray , Ashok Kumar Turuk, Energy Efficient Techniques for Wireless Ad Hoc Network, International Joint Conference on Information & Communication Technology, pages 105-111, January 2010.
- [49] Meng Li, Lin Zhang, Victor O. K. Li, Xiuming Shan, Yong Ren, An Energy-Aware Multipath Routing Protocol for Mobile Ad Hoc Networks, ACM Sigcomm Asia'05, Apr. 10-12, 2005, Beijing, China.
- [50] D. Kim, J.J. Garcia-Luna-Aceves, K. Obraczka, J.-C. Cano, and P. Manzoni. Routing mechanisms for mobile ad hoc networks based on the energy drain rate. IEEE Transactions on Mobile Computing, 2(2): 161–173, April-June 2003.