



GPS Based Guiding System for a Small Car

Mamon J. Mohammed¹, Loay E. George²¹Computer Science,College of Science/ University of Baghdad,
Al-jaderia/Baghdad, Iraq

Abstract : *This paper presents the development of GPS based guiding system for a small car. The tasks handled by the guiding system are the processing of collected GPS data, determination of deflections from the reference route path (a sequence of way points) and issuance of steering commands. A simple computational module was developed to calculate the deflection of current car position and its heading-angle relative to the planned route. The established guiding system includes a module for originating the proper motion control commands. The proportional steering command origination module depends on the position and heading angle of the vehicle relative to the planned route, such that the moving vehicle should stick around the route reference line till reaching its planned destination.*

Keywords: *Guiding system, GPS based Guidance system, Line following robot.*

1. Introduction

Since the advent of automation, the guidance and control of vehicle guidance became the primary focus for many research groups. Various algorithms have been developed for guidance purpose and different techniques have been implemented for control the autonomous motion of vehicles (Fahad2011).

In order to navigate through its environment the robot vehicle needs to determine its position relative to certain objects or landmarks. If the robot is going to follow a pre-defined path then the information it obtains must provide its position relative to the path. If the path is not pre-defined then the robot needs to know its position relative to the obstacles which it must navigate around. In both situations a flexible and quick method for relative positioning is necessary (Courtney1984).

Outdoor navigation is an exciting and quite varied topic; there are several types of environments for each one different levels of autonomy and different kind of sensors may require. The use of Global Positioning System (GPS) in outdoor localization is a quite common solution for large environments especially when no other localization resource are available and the positioning accuracy requirements are not so pressing. A GPS receiver relies on the signal received from several satellites that are not geostationary. Therefore, the number and the position of the available satellites change in time, which in turn influencing the system precision (Panzierit2001).

During the past few years a significant progress has been occurred in navigation resources applied to outdoor robots. In 1998, Yahja et. al.(Yahja1998) proposed the framed quad-tree concept which is basically a cell decomposition method. They presented some of the experimental results taken within some outdoor environments, but they did not take into account uncertainty of the collected results. Stentz improved this concept by making generalization to globally constrained problems (Stentz2002).

A probabilistic motion planner was introduced by Kavraki et. al. (Kavraki1994). This planner, called Probabilistic RoadMap (PRM), constructs a roadmap off-line during the learning phase, it consists of a set of nodes on the local path. Then during a query phase the path from a goal to a destination is found based on the nodes allocated during the learning phase. The algorithm is also extended and applied to Car-like robots, but the extended algorithm still requires complete knowledge of the map (Svestka1993). Recently, some new randomized motion planners were developed to perform the same process on-line and considering the vehicle dynamics (Lavelle2001, Hsu2002 and Frazzoli2002). The key assumption behind all these planners is that a perfect navigation loop exists, that is they assume a perfect knowledge about the environment (i.e., no uncertainty).

The goal of this paper is developing a GPS based guiding system for small car using a simple computation module that will determine the position and heading deflection of the car relative to the reference route line and, finally, originates the proper motion control command.

2. Guiding System platform

This system can be divided into several parts:

- Actuators (Motors and wheels)
- Central Processing Unit
- GPS Sensor
- Microcontroller with Digital to Analog Converter
- Driver

A special “subset” of continuous motors is the servo motor, which in the typical cases combines a continuous DC motor with a “feedback loop” to ensure the accurate positioning of the motor. A common form of servo motor is the kind used and hobby radio-controlled (R/C) cars and planes. R/C servos are in plentiful supply, and their cost is reasonable (Gordon2001). A robot RC car with size 1:6 scale was used in this project.

The system is equipped with mini laptop as central computing unit, the decision to use x86 compatible processor was driven primarily by the fact that most of available microcontrollers in the market, at the time of developing this project, are not yet completely capable of processing large amounts of data in real-time. The micro-controller (Arduino board) have been used to do command translation after being issued from the computer, this microcontroller does not handle any of the primary processing tasks for controlling the car. A mini laptop was placed in the car. Its CPU speed is 1.6 GHz and memory storage 1 GB. The computer was connected to the GPS sensor and the Arduino microcontroller via USB ports. Figure (1) presents the developed system layout.

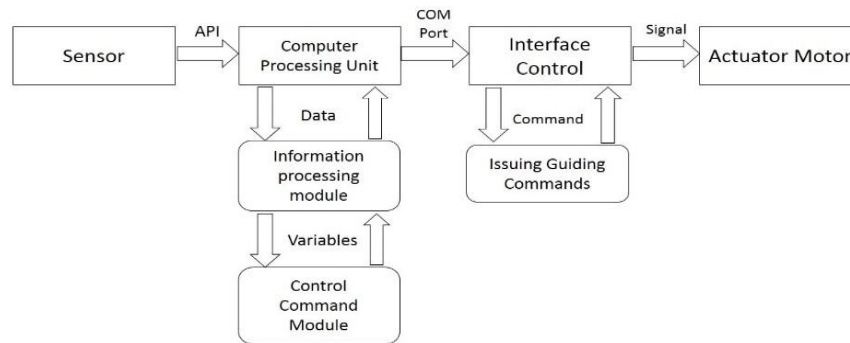


Fig. 1 System structure

3. Proposed System Description

The guiding system is a useful motion control approach for maneuvering mobile robots. Practically, a path is considered as a sequence of straight-line sections intersected at certain nodes with certain angles. The details of any planned path should be predefined before the mission. An appropriate path following algorithm should, therefore, be capable of smoothly controlling the moving car to pass through (or very close to) such intersections. Figure (2) presents the steps of the established guiding system modules.

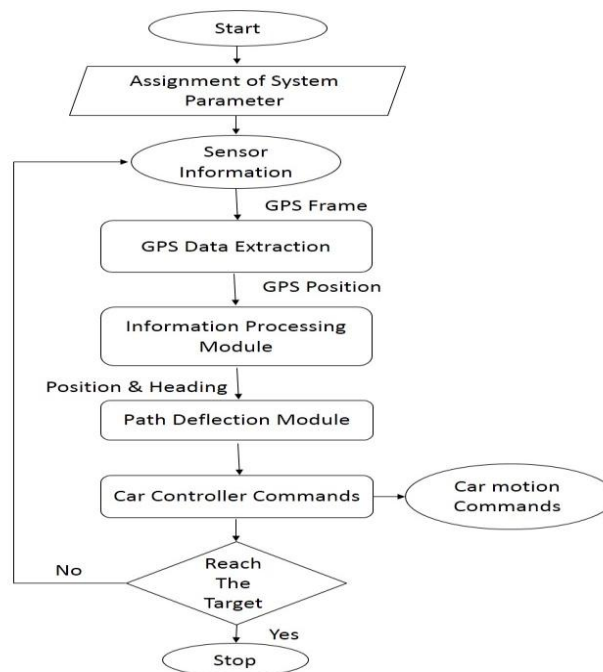


Fig. 2 Guiding system Modules

3.1 Actual Path Parameters Extraction Module

This module is mainly concerned with extraction of the path monitoring parameters using the GPS position coordinates. For our GPS-based guidance the car navigational data are extracted from the data frame sent by Garmin-manufactured GPS receiver. A wide variety of software was designed to convert trails, routes and waypoints data to computer-readable formats. Among these programs is, Franson GPSGate; it is a program that can provide a wide variety of Garmin data into a range of computer readable formats. This program provides a logical communication connection for reading the GPS sensor data via a virtual serial port as text.

3.2 Guiding Based on GPS Data

GPS stands for Global Positioning System; it refers to a space-based system of satellites providing time and location information. During the last decades the application of GPS was grown fast, and a variety of new relevant applications are still emerging in the market. GPS plays an important role in many electronic systems. For example, the electronic navigation system of automobile is a guiding system uses GPS as input sensor. It will provide data about the current position of the car and feed the data to the processing unit, and after processing the data a command is issued and send to the car steering system to keep its motion track on a predefined rout till reaching its destination.

A GPS receiver calculates its position by precisely timing the received signals which are periodically sent by GPS satellites. Each satellite continually transmits messages that include:

1. The time the message was transmitted.
2. The satellite position at time of message transmission.

The receiver uses the messages it receives to determine the transit time of each message and computes the distance to each satellite. These distances along with the satellites' locations are used with the possible aid of trilateration mathematic, depending on which algorithm is used by the receiver controller, to compute the position of the receiver.

The GPS based guiding system consists of three stages: (i) Input, (ii) Processing and (iii) Output. The system parameters should be set before the mission start, so the user should be assign the coordinates of the reference point before the system start. This reference point is used to determine the scale factors, which are necessary to map the coordinates from ellipsoidal coordinate system to a Cartesian flat coordinate system (x, y). The scale factors are calculated by determining the radius mean of the Earth at the reference point location, then the scale factors (S_x & S_y) are determined using the following simple model for the coordinates conversion:

1. Determine the latitude (θ_{ref}) and longitude (φ_{ref}) of the reference point:

$$\theta_{ref} = \frac{1}{n} \sum_{i=1}^n \theta_{ref}(i) \quad (1)$$

$$\varphi_{ref} = \frac{1}{n} \sum_{i=1}^n \varphi_{ref}(i) \quad (2)$$

Where, $\theta_{ref}(i)$ is the latitude of the i^{th} route control point, $\varphi_{ref}(i)$ is the longitude of the i^{th} route control point, n is the number of route control points. The pair ($\theta_{ref}(1)$, $\varphi_{ref}(1)$) represents the coordinates of route start point; and the pair ($\theta_{ref}(n)$, $\varphi_{ref}(n)$) represents the coordinates of the last destination point. The set of planned route control points should predefined by user before the vehicle mission.

2. Determine the radius of the earth at the reference point:

$$R_E = \sqrt{A^2 \cos^2(\theta_{ref}) + B^2 \sin^2(\varphi_{ref})} \quad (3)$$

Where A is the major radius of the Earth (sometimes called the radius at Earth equator), B is the minor radius of the Earth (sometimes called the radius at Earth poles).

3. Determine the scaling parameters:

$$S_y = \frac{2\pi R_E}{360} \quad (4)$$

$$S_x = S_y \cos(\varphi_{ref}) \quad (5)$$

4. Then for all route control points convert the ellipsoidal coordinates (θ_r, φ_r) to (X_r, Y_r) Cartesian coordinates:

$$X_r(i) = (\varphi_r(i) - \varphi_{ref}) * S_x \quad (6)$$

$$Y_r(i) = (\theta_r(i) - \theta_{ref}) * S_y \quad (7)$$

For all $i \in \{1, 2, \dots, n\}$

In the following section the steps taken within each stage of the established vehicle guiding system are illustrated:

A. Input: The data sent from GPS receiver is derived according to NMEA protocol. After receiving the GPS data frames, the input module extracts the longitude and the latitude coordinates, from the received GPS frames, and convert their format from (DDMM.MMM) to (DD.DDDDDDD), where D represent degree unit & M denotes minute unit.

B. Processing: the processing stage implies a set of computational tasks.

Step-1 Determination of route deflection: When the vehicle start moving then the guiding system starts processing the received GPS location to find the current vehicle position, then it measures the deflection distance between the actual car and the planned route line. The triangulation mathematics is used to find the distance between the actual vehicle route and the planned route. Some of trigonometric mathematical expressions have been used to determine the deflection distance. The planned route is determined as a sequence of straight lines, each line piece is defined by two successive route control points. Firstly the nearest route line segment to car should assigned; this task is done by determining the perpendicular distances from the car location to each route line, and then choosing the route line segment whose distance is the lowest one. Figure (3) presents an illustration for the vehicle-nearest route line segment. The line AB represents the current nearest route line segment, the point (C) represents the car position. As shown in the figure, the car deflection distance is equivalent to the distance CP (i.e., H) which is the height of the triangle (ABC) when the segment AB is considered as the base of the triangle. To determine the value of H the following computations have been applied:

1. Convert the vehicle coordinates from latitude-longitude coordinates (which are captured from GPS frames) to relative Cartesian flat coordinates:

$$X_{car} = (\varphi_{car} - \varphi_{ref}) * S_x \quad (8)$$

$$Y_{car} = (\theta_{car} - \theta_{ref}) * S_y \quad (9)$$

Where $(\varphi_{car}, \theta_{car})$ are the longitude, latitude, respectively, coordinates of the car; and (X_{car}, Y_{car}) are the corresponding Cartesian coordinates of the vehicle.

2. Determine the triangle lengths:

$$a = \sqrt{(X_{car} - X_j)^2 + (Y_{car} - Y_j)^2} \quad (10)$$

$$b = \sqrt{(X_{car} - X_{j+1})^2 + (Y_{car} - Y_{j+1})^2} \quad (11)$$

$$c = \sqrt{(X_{j+1} - X_j)^2 + (Y_{j+1} - Y_j)^2} \quad (12)$$

$$s = ((a + b + c))/2 \quad (13)$$


3. Determine the area of the triangle

$$A = \sqrt{s * (s - a) * (s - b) * (s - c)} \quad (14)$$

4. Then determine the height of the triangle

$$H = (2 - area)/c \quad (15)$$

Fig. 3 Triangle form

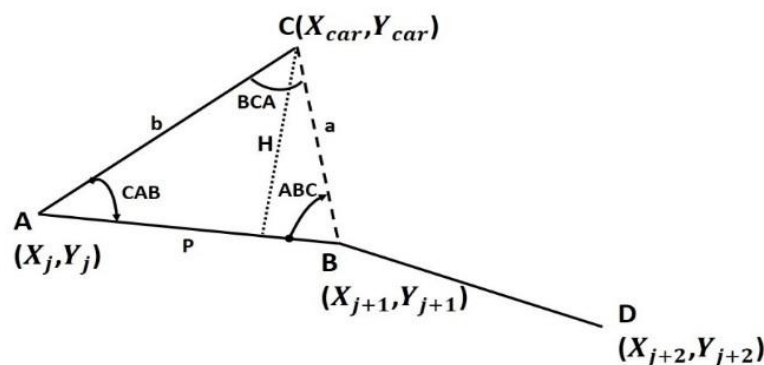

Step-2 Determine the heading angle of the car relative to the direction of the reference route line: as first step, the slope of the nearest route line is calculated. Also, the heading angle of the actual vehicle motion; this value is either extracted from the received GPS data frames or from the successive pairs of car cartesian coordinates calculated at the current time (t) and the previous one (i.e., at t-1). The following computations illustrate the procedure followed to determine the relative heading deflection:

1. Determine the direction of the planned (reference) route segment:

$$H_{route} = \tan^{-1} \left(\frac{X_r(j+1) - X_r(j)}{Y_r(j+1) - Y_r(j)} \right) \quad (16)$$

Where, $\{X_r(j), Y_r(j)\}$ & $\{X_r(j \pm 1), Y_r(j \pm 1)\}$ are the two pairs of Cartesian coordinates for the two terminal points of the nearest planned route segment.

2. Determine the heading angle of the moving vehicle:

$$H_{car} = \tan^{-1} \left(\frac{X_{car}(t+1) - X_{car}(t)}{Y_{car}(t+1) - Y_{car}(t)} \right) \quad (17)$$

Where, t is the current (t), $\{X_r(j), Y_r(j)\}$ are the current cartesian coordinates of the car and $\{X_r(j + 1), Y_r(j + 1)\}$ are the corresponding car coordinates before 1 second.

3. The relative heading deflection of the vehicle is:

$$\Delta H = H_{car} - H_{route} \quad (18)$$

Output: As a last stage for each guiding time slot, a steering command is issued. The time slot between the issued commands is one second due to the GPS data generation rate; it originates one set of GPS data frames per second. The issued command steers the vehicle motion to move on the pre-defined planned route. The command is calculated depending on the heading deflection angle and the position deflection of the car relative to the planned route.

3.3 Motion Command Determination

The camera based guiding systems includes a module for originating the proper motion control commands which make the system final response match the planned route requirements. The established closed-loop (feedback) controller uses the information gathered from the vehicle sensors to determine the required commands; and sends them to the vehicle actuator(s). This is the most suitable robust method of control for mobile robots (e.g. vehicles) since it allows the robot adapt its motion with any changes may occurred in its environment.

The established controller, in our project, issues steering commands which are simply depend on both position deflection (ΔP) and heading deflection (ΔH). The position deflection part of the originated guidance command is

manipulated linearly while the heading deflection part is manipulated non-linearly as presented in the following equations

1. The originated command (Cmd) is

$$Cmd(\Delta P, \Delta H) = F_1(\Delta P) + F_2(\Delta H) \quad (19)$$

Where $F_1(\Delta P)$ is the command part which depends on the position deflection; and $F_2(\Delta H)$ is the command part which compensates the heading deflection.

2. The command position dependent part is linearly proportional with position deflection value:

$$F_1(\Delta P) = \beta(P_{actual} - P_{planned}) \quad (20)$$

Where P_{actual} is the current actual position of the vehicle; $P_{planned}$ is the planned position (or the route line); and β is a proportional factor (i.e., the command weight factor that compensate the position deflection).

3. The command heading dependent part is exponentially dependent on the heading deflection

$$F_2(\Delta H) = \frac{M}{\text{sign}(\Delta H) * K(\Delta H)} \quad (21)$$


$$K(\Delta H) = \begin{cases} 0 & \text{if } |\Delta H| < T \\ \exp(\alpha|\Delta H|) + 1 & \text{if } |\Delta H| > T \end{cases} \quad (21.1)$$

$$\text{sign}(\Delta H) = \begin{cases} 1 & \text{if } \Delta H \geq 0 \\ 0 & \text{if } \Delta H < 0 \end{cases} \quad (21.2)$$

Where M is the weight of command heading part; α is a turning decay rate which is used as tuning parameter to control the system sensitivity relative to heading deflection; T is the lowest heading deflection value above it the system makes a response depending on the heading deflection.

The proper values of the control parameters (i.e., β , α) depends on the physical characteristics of the vehicle, there is no fixed set of values that can be adopted to every implementation of the control system. Instead, the (β , α , M) parameters used in commands determination equations must be *tuned* to the particular vehicle platform for which they will be used to control. Figure (4) shows the system motion before and after tuning.

Fig. 4 The system motion before and after tuning

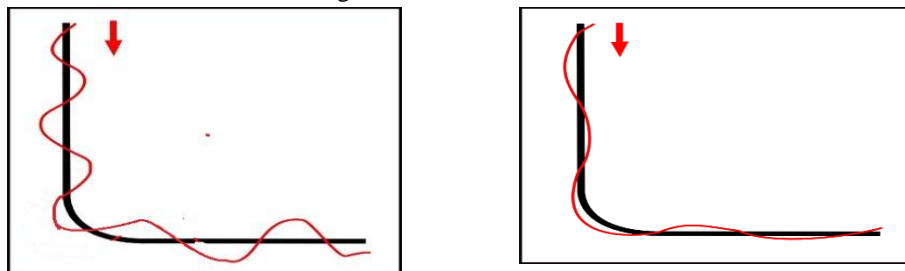

4. Results and Conclusions

The conducted test, in this work, have focused on determining both the heading deflection and the position of the car relative to the reference route line. Figure (5) presents the waypoints and the associated perceptual route line. The reference are perfectly positioned and predetermined.

From the reference points shown in Figure (5) the required mapping coefficient are calculated during the initial phase (i.e., before the mission start). The determined scale factors for this test are ($S_x = 97.95$, $S_y = 111.20$). During the test the received GPS data are recorded as the actual car position, and compared with perceptual planned route to determine the deflection in position and heading, Table (1) presents the actual route points registered during the test, also the distance of the current position relative to the reference route line, heading deflection of the car relative to the reference line are also tabulated in the table

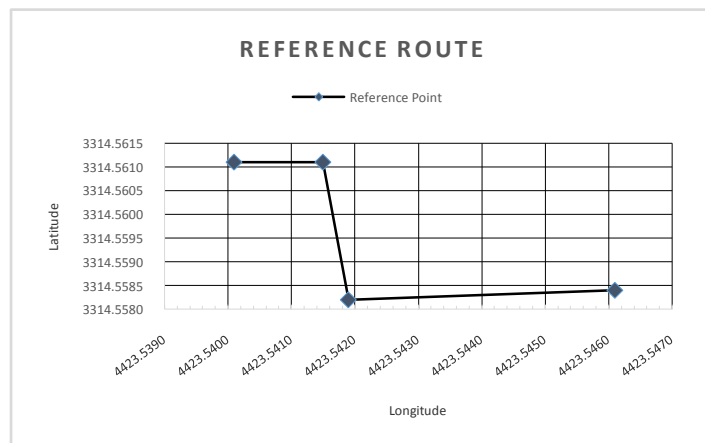


Fig. 5 The reference route line

Table (1) The guiding system based GPS-data results

| Time/sec | Latitude | Longitude | Deflection distance in meter | Heading deflection in degree |
|----------|-----------|-----------|------------------------------|------------------------------|
| 0 | 3314.5584 | 4423.5461 | 0.00 | 1.99 |
| 1 | 3314.5584 | 4423.5458 | 0.02 | 2.40 |
| 2 | 3314.5584 | 4423.5455 | 0.05 | 2.40 |
| 3 | 3314.5584 | 4423.5451 | 0.08 | 2.40 |
| 4 | 3314.5583 | 4423.5448 | -0.06 | -13.99 |
| 5 | 3314.5583 | 4423.5445 | -0.04 | 2.40 |
| 6 | 3314.5582 | 4423.5441 | -0.17 | -9.98 |
| 7 | 3314.5581 | 4423.5437 | -0.30 | -10.04 |
| 8 | 3314.5580 | 4423.5434 | -0.44 | -13.99 |
| 9 | 3314.5580 | 4423.5430 | -0.41 | 2.40 |
| 10 | 3314.5579 | 4423.5427 | -0.55 | -13.90 |
| 11 | 3314.5578 | 4423.5423 | -0.63 | -93.55 |
| 12 | 3314.5578 | 4423.5420 | -0.08 | -81.09 |
| 13 | 3314.5580 | 4423.5420 | -0.13 | 8.91 |
| 14 | 3314.5582 | 4423.5419 | 0.00 | -20.68 |
| 15 | 3314.5585 | 4423.5418 | -0.11 | -11.86 |
| 16 | 3314.5588 | 4423.5418 | -0.03 | 8.91 |
| 17 | 3314.5591 | 4423.5418 | 0.04 | 8.91 |
| 18 | 3314.5594 | 4423.5417 | -0.06 | -11.75 |
| 19 | 3314.5597 | 4423.5417 | 0.01 | 8.91 |
| 20 | 3314.5601 | 4423.5417 | 0.11 | 8.91 |
| 21 | 3314.5604 | 4423.5417 | -1.14 | 90.00 |
| 22 | 3314.5606 | 4423.5417 | -0.82 | 90.00 |
| 23 | 3314.5609 | 4423.5417 | -0.33 | 90.00 |
| 24 | 3314.5611 | 4423.5415 | 0.00 | 41.29 |
| 25 | 3314.5612 | 4423.5414 | 0.16 | 41.54 |
| 26 | 3314.5613 | 4423.5413 | 0.33 | 41.20 |
| 27 | 3314.5613 | 4423.5412 | 0.33 | 0.00 |
| 28 | 3314.5612 | 4423.5409 | 0.16 | -16.30 |
| 29 | 3314.5612 | 4423.5406 | 0.37 | 33.41 |
| 30 | 3314.5612 | 4423.5403 | 0.07 | 33.41 |
| 31 | 3314.5611 | 4423.5401 | 0.00 | 1.99 |

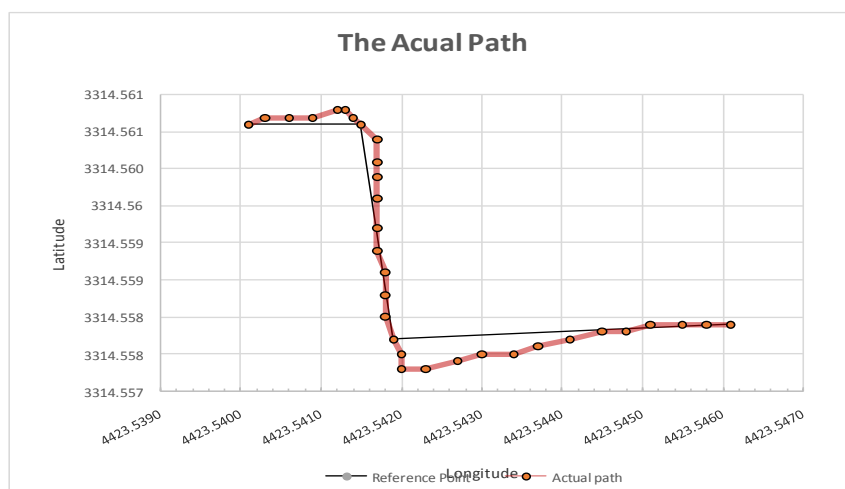


Fig. 6 The actual path of the car guided by GPS guiding system

The information processing module for GPS based guiding system focus on the distance from the planned route line and the deflection heading angle of the car relative to the reference route line. Figure (6) shows a graphical presentation of the planned route and the actual car position

Reference

- Fahad U., Qaiser H., Muhammed I., and Khawaja M., "*Autonomous Vehicle Guidance and Control using Open Street Map and Advanced Integration Techniques*", *International Journal of Computer Theory and Engineering*, Vol. 3, No. 5, October 2011.
- J. W. COURTNEY, M. J. MAGEE and J. K. AGGARWALJ, "*Robot Guidance Using Computer Vision*", *Pattern Recognition* Vol. 17. No. 6, pp. 585-592, 1984.
- S. Panzieri, F. Pascucci, G. Uliviti, "*An outdoor navigation system using GPS and inertial platform*", IEE/ASME International Conference on Advanced Intelligent Mechatronics, Como, Italy, 2001.
- A. Yahja, S. Singh and A. Stentz, Efficient On-Line Path Planner for Outdoor Mobile Robots, *Robotics and Autonomous Systems*, 32(2): pp. 129-143, 2000.
- A. Stentz, CD*: A Real-Time Resolution Optimal Re-Planner for Globally Constrained Problems, *American Association for Artificial Intelligence*, 2002.
- L. E. Kavraki, P. Svestka and M. H. Overmars, Probabilistic Roadmaps for Path Planning in High-Dimensional Configuration Spaces, *UU-CS (Ext.r. no. 94-32)*, Utrecht, 1994.
- P. Svestka, A Probabilistic Approach to Motion Planning for Car-Like Robots, *RUU-CS (Ext. r. no. 93-18)*, Utrecht, 1993.
- S. LaValle and J. Kuffner, Randomized Kinodynamic Planning, *International Journal of Robotics Research*, 20(5): pp. 378-400, 2001.
- D. Hsu, R. Kindel, J. C. Latombe and S. Rock., Randomized Kinodynamic Motion Planning with Moving Obstacles, *International Journal of Robotics Research*, 21(3): pp. 233-255, 2002.
- E. Frazzoli, M. A. Dahleh and E. Feron., Real-Time Motion Planning for Agile Autonomous Vehicles, *Journal of Guidance, Control, and Dynamics*, 25(1): pp. 116-129, 2002.
- Gordon M., "The Robot Builder's Bonanza", *McGraw-Hill*, DOI: 10.1036/0071386718, Second Edition, 2001.