



Simulation and Harmonics Reduction of Wind-Pv Hybrid System

Anumeha Awasthi
EEE Department,
RIET Kanpur (UP)
India

Kuldeep Sahay
EE Department,
IET Lucknow (UP)
India

Anuj Yadav
CSE Department,
NIT Hamirpur (HP)
India

Abstract - This paper proposes a hybrid energy conversion system combining photo voltaic and wind turbine as a small-scale alternative source of electrical energy. The set-up consists of a photo-voltaic solar-cell array, a mast mounted wind generator, lead-acid storage batteries, a PWM inverter unit to convert DC power to AC power, IGBT and 3-phase loads. As the wind and sun shine is not available all the time, solar and wind power alone are poor power sources. Thus Hybridizing solar and wind power sources together with storage batteries is better option. Photo-Voltaic or solar cells, convert the energy from sunlight into DC electricity. PVs holds advantage over other renewable energy sources in that they give off no noise, and practically require no maintenance. Wind- turbines and PV cells provide DC power. A semiconductor-based device known as a power inverter is used to convert the DC power to AC power. The hybrid unit contains two complete generating plants, a PV solar cell plant and a wind-turbine system. These sources are connected in parallel to a 12V DC line. The power is next connected to a DC to AC inverter and is then supplied from the inverter's output to a 3 phase load.

Keywords— PV model, Wind Model, Hybrid system, IGBT, Battery, PWM Inverter, load.

I. Introduction

As power demand increasing day by day, the renewable energy power sources, wind and solar have experienced a rapid growth around the world. Having wide geographical spread they can be generated near load centers, thus eliminating the need of high voltage transmission lines running through rural and urban landscapes. The abundant energy available in nature can be harnessed and converted to electricity in sustainable and clean way to supply the necessary power without access to electricity grid. This paper proposes a hybrid energy conversion system combining photo voltaic and wind turbine as a small-scale alternative source of electrical energy.

II. Related Work

It includes work in various fields like analysis of cost effectiveness of stand-alone hybrid system. Feasibility of solar wind system in villages. The sizing and simulation of hybrid power system and modeling of wind PV hybrid system using a new converter topology.

III. Pv Cell

PV cell is basically a semiconductor $p-n$ junction-based photodiode. This semiconductor photodiode generates electrical power when exposed to light. The power produced by a single PV cell is not enough Therefore, by connecting PV cells in series, higher voltage can be obtained and in parallel higher current can be obtained consequently higher power. Generally, a combined series and parallel connection of PV cells is known as a module. Mostly, commercial modules consist of 36 or 72 cells. The modules consist of transparent front side, encapsulated PV cells, and back side. The front side material is usually made up of low-iron and tempered glass. A PV array (system) is an interconnection of modules which in turn is made up of many PV cells connected in series and parallel. The power produced by a single module is seldom enough for commercial use, so modules are connected to form an array to supply the load.

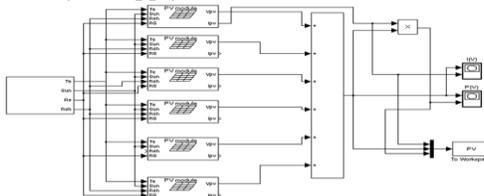


Fig. 1

The equivalent circuit of a PV cell is shown in

Fig. It includes a current source, a diode, a series resistance and a shunt resistance. In view of that, the current to the load can be given as




Fig .2

$$I = i_{qv} - i_o (e^{qV/Kt} - 1)$$

$$V = kt/q \ln(I - i_{pv} / i_o)$$

Where:

k - Boltzmann constant (1.3806 10⁻²³ J/K)

t - Reference temperature of solar cell

q - Elementary charge (1.6021 10⁻¹⁹ As)

V - Solar cell voltage (V)

i_o - saturation current of the diode (A)

i_{pv} - Photovoltaic current (A)

With help of these equations simulink model of photovoltaic is designed. In view of that, the current to the load can be given as:

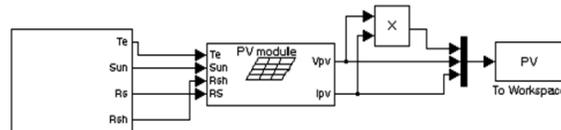


Fig. 3

IV. Wind Power

The wind is a renewable energy source, continuously generated or replenished by the forces of nature. Wind Power is energy extracted from the wind, passing through a machine known as the windmill. Electrical energy can be generated from the wind energy. This is done by using the energy from wind to run a windmill, which in turn drives a generator to produce electricity. The windmill in this case is usually called a wind turbine. This turbine transforms the wind energy to mechanical energy, which in a generator is converted to electrical power. An integration of wind generator, wind turbine, aero generators is known as a wind energy conversion system (WECS)

Component of a wind energy project

Modern wind energy systems consist of the following components

A tower on which the wind turbine is mounted, A rotor that is turned by the wind, The nacelle which houses the equipment, including the generator that converts the mechanical energy in the spinning rotor into electricity. The diameter of the area swept by the rotor is also important. The amount of power transferred to a wind turbine is directly proportional to the area swept out by the rotor, to the density of the air, and the cube of the wind speed. The power P in the wind is given by

$$P = \frac{1}{2} C_p \cdot \rho \cdot A \cdot V^3$$

Where,

C_p is the turbine power coefficient. A theoretical maximum value of 0.593 has been proposed for C_p.

ρ = air density (kg/m³)

A is the rotor swept area = $\Pi d^2/4$ (m²)

Where,

d is the rotor blade diameter (m) and V' = mean wind speed (ms⁻¹)

Batteries

Many wind energy systems use batteries to supply electricity when the wind is not adequate. A system without batteries will only provide power when sufficient wind is blowing to meet the demand.

Inverters

Energy stored in batteries is available as DC power. Some appliances and equipment are designed and built to run on DC power. In this paper a pv-wind hybrid system is designed, which includes solar panel that gives dc energy. This dc energy is converted to ac with the help of inverter. The ac output can be seen on scopes. Similarly, wind energy is saved and given to load.

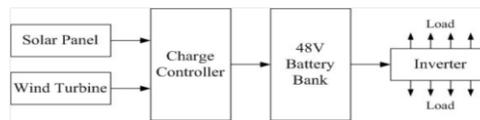


Fig. 4

.Using the RegenSim. Library a renewable energy hybrid System developed consist of power generation blocks from renewable energy sources such as sun, wind, battery blocks (providing the energy storage), measurements blocks for electrical parameters (voltage, current etc), inverter blocks (for power generation in DC voltage), energy consumer block

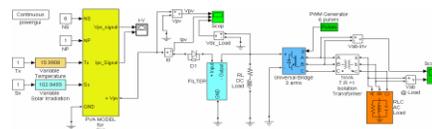


Fig. 5

V. Conclusion

A generalized PV model which is representative of the all PV cell, module, and array has been developed with Matlab/Simulink and been verified with a PV cell and a commercial module. The proposed model takes sunlight irradiance and cell temperature as input parameters and outputs the I-V and P-V characteristics under various conditions. This model has also been designed in the form of Simulink block libraries. Such a generalized PV model is easy to be used for the implementation on Matlab/Simulink modeling and simulation platform. Especially, in the context of the Sim Power System tool, there is now a generalized PV model which can be used for the model and analysis in the field of solar PV power conversion system. The future work includes that dc output when converted to ac by inverter contains harmonics, these harmonics can be reduced by various technologies.

Acknowledgment

We would like to gratefully acknowledge the contributions of Dr. Kuldeep sahay of IET, Lucknow for providing information for this analysis.

References

- [1]. Mehdi dali, jamel Blhadj and Xavier Roboam: *Design of a stand-alone hybrid photovoltaic-wind hybrid system with battery storage*, IEEE Transaction.
- [2]. John A. Castle, James M. Kallis and Sally M. Moite, and Neil A. Marshall Hughes Aircraft Company “*Analysis of Merits of Hybrid Wind/Photovoltaic Concept for Stand-Alone System*”.15th IEEE Photovoltaic Specialists Conference.
- [3]. M. Muralikrishna and V. Lakshminarayana “*Hybrid (Solar and Wind) Energy Systems For Rural Electrification*” ARPN Journal of Engineering and Applied Sciences Vol. 3, No. 5, October 2008.
- [4]. Mustafa Engin “*Sizing and Simulation of PV- Wind Hybrid Power System*”. Hindawi Publishing Corporation International Journal of Photo energy Volume 2013, Article ID 217526, 10 pages.
- [5]. Teena Jacob and Arun S “*Modelling Of Hybrid Wind And Photovoltaic Energy System Using A New Converter Topology*” EEEIJ Vol.1, No.2, August 2012.
- [6]. Chitesh dubey, yogesh tiwari “*Design solar (photovoltaic) - wind hybrid power generation system.*” International Journal of Emerging Trends & Technology in Computer Science (IJETTCS) Volume 1 Issue 4, November – December 2012 ISSN 2278-6856
- [7]. Dorin Bica, Cristian Daroc, Dumitru, Adrian, “*Isolated hybrid solar-wind-hydro renewable energy systems.*” Scientific bulletin of the Petru Maior University of the Targu Mures Vol. (XXIV),No.2 2010 ISSN 1841-9267
- [8]. M. Buresch: *Photovoltaic Energy Systems Design and Installation*, McGraw-Hill, New York, 1983.
- [9]. Y-C. Kuo, T-J. Liang and J-F. Chen: *Novel Maximum-Power-Point-Tracking Controller for Photovoltaic Energy Conversion System*, IEEE Transactions On Industrial Electronics, Vol. 48, No.3, June 2001, Pp.594-601.
- [10]. Matlab and Simulink, The Mathworks, Inc as of January 2012, <http://www.mathworks.com>