



Memetic Algorithm: Hybridization of Hill Climbing with Replacement Operator

Ms. Meenu Vaid¹

M.Tech Student

CSE Department

Mr. Amit Verma²

Assistant Professor & Head

CSE Department

^{1,2}Samalkha Group Of Institutions, Kurukshetra University

Abstract— Genetic Algorithms are the population based search and optimization technique that mimic the process of natural evolution. Premature Convergence and genetic drift are the inherent characteristics of genetic algorithms that make them incapable of finding global optimal solution. A memetic algorithm is an extension of genetic algorithm that incorporates the local search techniques within genetic operations so as to prevent the premature convergence and improve performance in case of NP-hard problems. This paper proposes a new memetic algorithm where hill climbing local search is applied to each individual selected after selection operation. The experiments have been conducted using four different benchmark functions and implementation is carried out using MATLAB. The function's result shows that the proposed memetic algorithm performs better than the genetic algorithm in terms of producing more optimal results and maintains balance between exploitation and exploration within the search space.

Keywords—benchmark functions, hybrid genetic algorithms, hill climbing, memetic algorithms.

I. INTRODUCTION

Genetic algorithms are the search technique based on the evolutionary ideas of natural selection and genetics [1]. Genetic algorithms use the principles inspired by natural population genetics to evolve solutions to problems. They follow the principle of survival of fittest [2], for better adaptation of species to their environment. For more than four decades, they have been applied on wide range of optimization problems.

The performance of genetic algorithms depends on the balancing between the exploitation and exploration techniques. Exploitation means to use the already available knowledge to find out the better solution and Exploration is to investigate new and unknown area in search space. The power of genetic algorithms comes from their ability to combine both exploration and exploitation in an optimal way [3]. Genetic algorithms are inspired from biological genetics model and most of its terminology has been borrowed from genetics.

Each allele has a unique position on chromosome called locus. Genetic algorithm uses an iterative process to create a population. The algorithm stops, when the population converges towards the optimal solution. It consists of following steps:-

INITIALIZATION: Randomly generate a population of N chromosomes.

SELECTION: Individuals are selected to create mate pool for reproduction according to selection methods.

REPRODUCTION: Crossover and mutation operators applied on the mate pool individuals.

REPLACEMENT: Individuals from old population are replaced by new ones according to replacement strategies.

In practice, the population size is finite that influences the performance of genetic algorithm and leads to the problem of genetic drift that occurs mostly in case of multimodal search space. Incorporating a local search method within the genetic operators can introduce new genes than can overcome the problem of genetic drift and accelerate the search towards global optima [4]. A combination of genetic algorithm and a local search method is called as hybrid genetic algorithm or memetic algorithm. In hybrid genetic algorithms, knowledge and local search can be incorporated at any stage like initialization, selection, crossover and mutation. This paper incorporates hill climbing based local search after selection step, the new algorithm is proposed called as hybrid genetic and hill climbing algorithm (HGCA). The proposed HGCA is compared with Genetic algorithm(GA) on standard benchmark multimodal functions.

The paper is organized in the following sections. In section 2, literature review is given on different researches related to hybrid genetic algorithms. In section 3, memetic algorithm approach and hill climbing search along with their pseudo codes are discussed. In section 4, benchmark test functions considered for implementation are described. Implementation details and computational results are specified in section 5 and conclusion and future work are given in section 6.

II. RELATED WORK

Holland [3] and David Goldberg [1] by using k armed bandit analogy showed that both exploration and exploitation are used by genetic algorithm at the same time. Due to certain parameters, it has been observed that, stochastic errors occur in genetic algorithm that leads to genetic drift [5,6] proposed a novel crossover operator that uses the principle of Tabu search. They compared the proposed crossover with PMX and found that the proposed crossover yielded better results than PMX [7]. H.A. Sanusi et al. investigated the performance of genetic algorithm and memetic algorithm for constrained optimization knapsack problem. The analysis results showed that memetic algorithm converges faster than genetic algorithm and produces more optimal result [8]. A comparative analysis of memetic algorithm based on hill climbing search and genetic algorithm has been performed for the cryptanalysis on simplified data encryption standard problem by Poonam Garg [9]. She concluded that memetic algorithm is superior for finding number of keys than genetic algorithms.

Antariksha [10], proposed a hybrid genetic algorithm based on GA and Artificial Immune network Algorithm (GAIN) for finding optimal collision free path in case of mobile robot moving in static environment filled with obstacles. She concluded that GAIN is better for solving such kind of problems. E .Burke et al. proposed a memetic algorithm that based on Tabu search technique to solve the maintenance scheduling problem. The proposed MA performs better and can be usefully applied to real problems [11]. Malin et al [12] proposed a memetic algorithm for feature selection in volumetric data containing spatially distributed clusters of informative features in neuroscience application. They concluded that the proposed MA identified a majority of relevant features as compared to genetic algorithm.

III. HILL CLIMBING

An optimization problem can usually also be modeled as a search problem, since searching for the optimum solution from among the solution space [7]. Without any loss of generality, assuming that our optimization problems are of the maximization category. So, here is the hill climbing technique of search:

1. Start with an initial solution, also called the starting point. Set current point as the starting point
2. Make a move to a next solution, called the move operation
3. If the move is a good move, then set the new point as the current point and repeat (2). If the move is a bad move, terminate. The last current solution is the possible optimum solution.

The move operation is problem dependent. In a discrete optimization problem, such as the Travelling Salesman Problem, a move operation would probably shuffle a couple of positions in the original solution [7]. To avoid getting stuck in local minima we adopt a random-restart hill-climbing. Random initial states are generated, running each until it halts or makes no discernible progress. The best result is then chosen. Hill climbing is used widely in artificial intelligence fields, for reaching a goal state from a starting node. Hill climbing is often used when a good heuristic function is available for evaluating states but when no other useful knowledge is available. Hill climbing can often produce a better result than other algorithms when the amount of time available to perform a search is limited, such as with real-time systems

Description of the GA with hill-climbing method

Iteratively, GA produces better solutions using HC as an 'accelerator' mechanism thanks to the exploitative properties of HC [9]. When evaluating the fitness of each individual, GA use the results of HC working with an initial guess corresponding to this individual, there are thus as many HC running in parallel as individuals in the population [10]. During reproduction and genetic transformation (crossover, mutation) for the production of the individuals of the next generation, GA work on the new solution.

It must be noted that, when evaluating the individuals with HC, it is not necessary to reach complete convergence. Individual optimization (life) can be performed over a limited number of steps for two reasons, one because the main part of the information given by the search with HC is acquired during the first few steps, and two the search is pursued and refined over the next generations anyway. In practice, the hybrid terminates with an 'extended-life' in which the best individual of the last GA generation is exploited by HC using the normal termination criteria (nearly complete convergence). Optimization problem of De Jong's function (finding the minimal value approaching zero) solved using simple genetic algorithm with Replace All scheme. In memetic algorithm, in spite of using the basic generational update, hill climbing helps in finding the better individuals for replacement. These improvements accumulate over all the generations, resulting in a larger improvement in the total performance. Genetic algorithm and local search have complementary properties, which helps in optimization of objective function with fast convergence

IV. METHODOLOGY

Procedure for memetic algorithm is same as simple genetic algorithm except that a local search method is implemented in one of the operator (crossover, selection, replacement) to exploit the search space. Applying Hill climbing in replacement operator work efficiently to find the optimal solution.

Simple GA represents an intelligent exploration, having a random search confined within a defined search space for solving a problem optimally. Simple GA starts with random initialization of population. After this fitness function is used to calculate

the fitness of each individual and then reproduction is applied. In order to incorporate the offspring into original population replacement is used. Various replacement schemes are used for maintaining the useful diversity of population [11]. Elitist replacement schemes improve the performance of genetic algorithm. Using different replacement and selection schemes in steady state, genetics converge quickly and have a useful diversity. Diversity helps in finding the optimal solution. The time needed to reach the global optimum can be reduced if local search methods and local knowledge are used to accelerate locating the most promising region in addition to locating the global optimum starting within basin of attraction [12]. Meta heuristic search mechanism in the memetic algorithm offers the speed and quality of convergence. Reducing the population size can lead to an increase in the algorithm convergence speed.

Pseudo code for memetic algorithm

1. Encode solution space
2. Set pop_size, chrom_size, max_gen, Gen=0
3. Initialize population P randomly
4. For each individual $i \in P$: calculate fitness (i);
5. While (Gen < Gensize)
Apply generic GA *selection * cross-over *mutation
** For each individual $i \in P$: do local_search(i); *replacement
6. Test: Test whether the termination condition is Satisfied. If so, stop. If not, return the best solution in current population and go to Step 5

Hill climbing is applied in replacement for hybridization. A chromosome is chosen randomly and its random gene value is replaced by a random value. If the newly generated chromosome have better fitness than it replace the old chromosome else check the loop condition. To analyse the optimization ability of the algorithm on different De jong's functions, work is applied on it. Algorithms that are not able to discover good directions underperform in some problems

Pseudo code for memetic local search

1. Loop: if $i < \text{no_of_run}$
2. Select random chromosome
3. Select random gene position and Replaces its value by a randomly generated valid value
4. Calculate the fitness of new chromosome
5. If (fitness_new < fitness_old) Replace the old chromosome if better

The simplest test function is De Jong's F1. It is continuous, convex and unimodal. The performance on Sphere is a measure of the general efficiency of the algorithm Generalized Rastrigin Function is a typical example of non-linear multimodal function. This function is a fairly difficult problem due to its large search space and its large number of local minima. The Ackley Problem is a minimization problem. Originally this problem was defined for two dimensions, but the problem has been generalized to N dimensions. Number of local minima: several local minima. The global minimum: $\mathbf{x}^* = (0, \dots, 0)$, $f(\mathbf{x}^*) = 0$. Schwefel's function is deceptive in that the global minimum is geometrically distant, over the parameter space, from the next best local minima. Therefore, the search algorithms are potentially prone to convergence in the wrong direction. The schwefel's function is symmetric, separable and multimodal (left). Rotating this function creates a non-separable surface with similar features [13].

V. EXPERIMENTAL RESULTS

Using the method described in the previous section we tried to determine the effect on the performance of GA. Using low probability for mutation removes an additional variable of consideration. Testing memetic algorithm may make use of different population size to that of Rastrigin model function for better understand ability of results. Work is having arithmetic crossover taking alpha 0.3.

The general parameters used for all experiments, unless otherwise stated were:

1. Random initialization
2. Value encoding
3. Arithmetic crossover
4. Uniform mutation
5. 0.8 crossover probability
6. Breeding pool at 100% of population size
7. mutation probability .01
8. Generations at gap of 50 starting from 50 to 200.
9. Population size of 10 having 5 as gene size.

Graphs are plotted between minimum fitness and number of generations. We examined the minimum and average values of the optimization function.

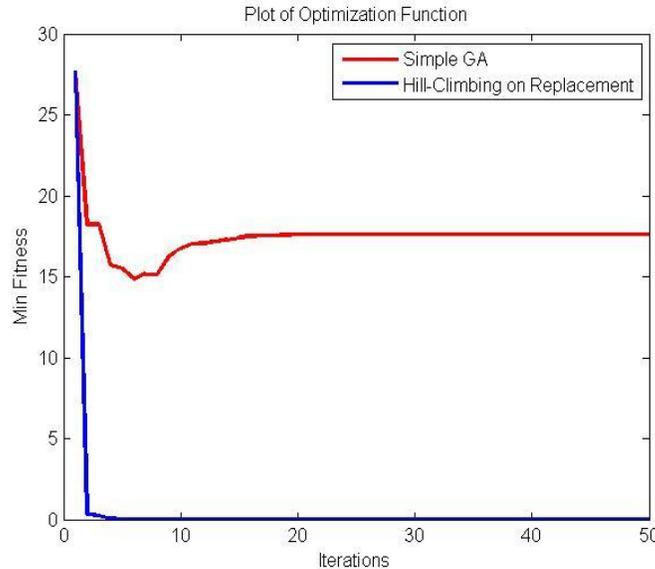


Figure 1: Plot of sphere model function (F1) with effect of population size

Table 1 Results of sphere model function

Number of Generation		Genetic algorithm	Memetic algorithm
50	Min	14.98	1.67e004
	Avg	17.28	0.46
100	Min	4	2.205e004
	Avg	5.5	0.39
150	Min	14	1.8e005
	Avg	16.79	0.11
200	Min	0.72	2.78e005
	Avg	3.7	0.1467
400	Min	5.5	1.5e005
	Avg	6.29	0.029

From analyzing the graph and result table, Sphere model function is totally optimized by the memetic algorithm and memetic algorithm performs better than simple genetic algorithm. Increasing the number of generation, implemented work give better optimal values. Runs of implemented work are done with various population sizes.

Follow the well-known fact that increasing the population size increase the convergence rate, up to a certain limit. After that it have little effect of increase in population size.

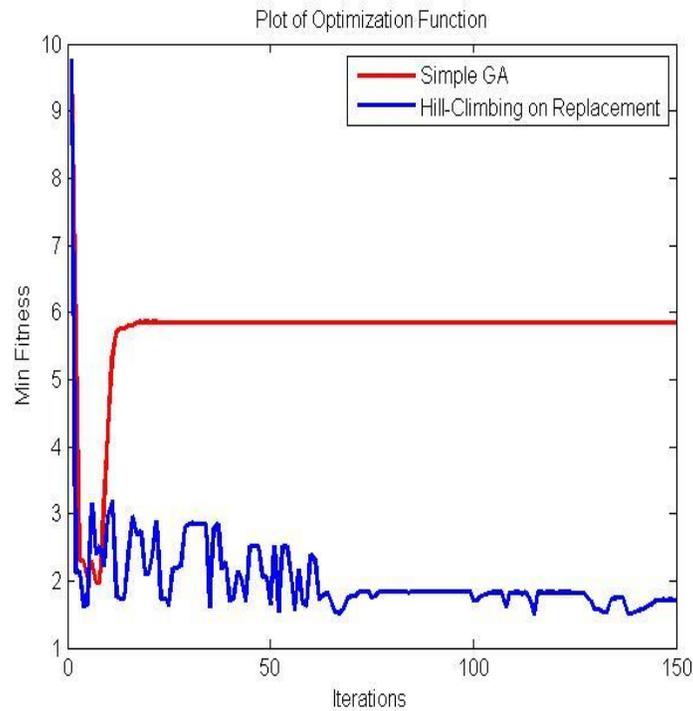


Figure 2: Plot of Ackley path function with different population size

Table II Results of Ackley path function

Number of Generation		Genetic algorithm	Memetic algorithm
150	Min	1.5	1.49
	Avg	5.8	1.64
200	Min	1.67	1.49
	Avg	2.72	1.56
700	Min	1.42	1.49
	Avg	1.49	1.53

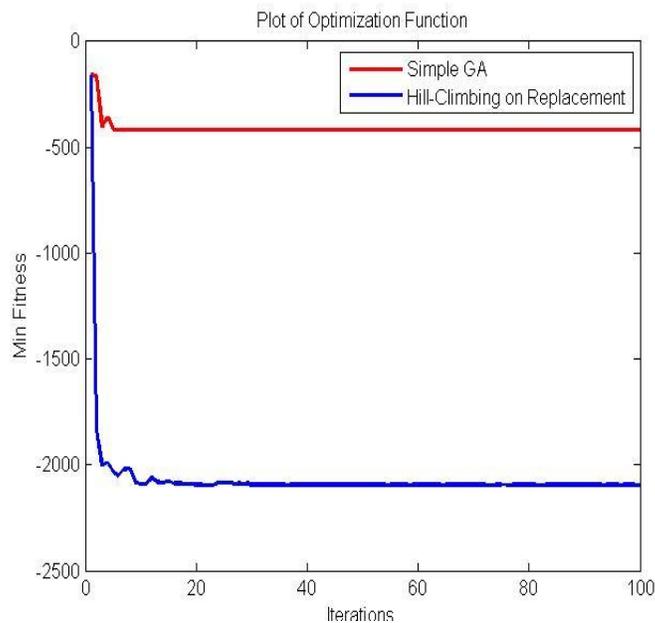


Figure 3: Plot of Schwefel's function with different population size

Table III Results of the Schwefel's [F6] function

Generation		Genetic algorithm	Memetic algorithm
50	Min	-9.08 e002	-2.09 e003
	Avg	-4.32 e002	-2.02 e003
100	Min	-7.3 e002	-2.09 e 003
	Avg	-86.43	-2.06 e003
150	Min	-5.6e002	-2.09 e003
	Avg	28	-2.07 e003
500	Min	-6.9 e 002	-2.09 e003
	Avg	-1.2 e 002	-2.08 e003

With Ackley path function simple genetic algorithm optimal value decreases with increase in generation .While memetic algorithm have no effect of population size contradict the general behavior of SGA. Genetic algorithm shows unpredictable behaviour as implemented without elitism. For Rastrigin function [F7], memetic algorithms have negligible effect of population size and number of generation on the convergence speed giving same optimal value for each run.

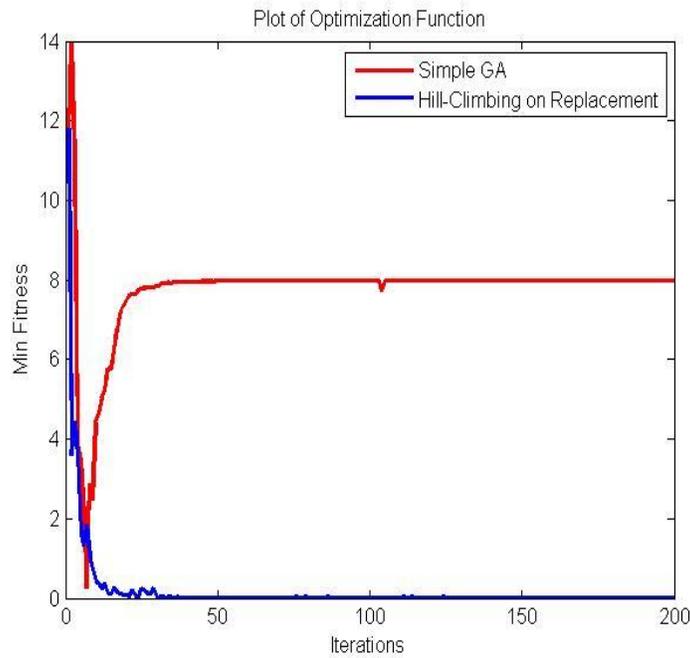


Figure 4: Plot of Rastrigin function [F7] with different population size

Table IV Result for Rastrigin function [F7]

Generation		Genetic algorithm	Memetic algorithm
50	Min	23	1.50
	Avg	48	1.83
100	Min	1.01	1.43
	Avg	6.1	1.72
200	Min	0.5	1.43
	Avg	7.3	1.865
400	Min	1.6	1.49
	Avg	8.3	1.76

VI. CONCLUSION AND FUTURE WORK

This paper proposes a pseudo code of the algorithm and analyzes the optimization ability of Hill climbing in replacement (by implementing the proposed algorithm in matlab). The memetic algorithm ability depends on the way of utilizing the information from both the searching mechanism i.e. genetic algorithm and local search. The optimization of different Dejong's function is implemented to evaluate the general computational behavior of Genetic and memetic algorithm. At the initial stage, the genetic algorithm is implemented as the basic architecture on this algorithm. Further, the analysis is performed on the different replacement operators. Here, replace all and hybridization of hill climbing in replacement Algorithm are discussed comparatively to identify the convergence scenario.

After executing the Memetic algorithm on De jong's function, it was concluded that function Sphere model and Rastrigin find better optimal result close to zero as compare to simple GA. Schwefel and Ackley path functions gives good result using memetic algorithm. Hill climbing works well as a replacement operator to exploit the search space and resulted in finding the better optima as compare to simple genetic algorithm with fast convergence. Memetic by exploiting operators that can lead to deteriorated points from which progress can be achieved at a later stage of the search.

REFERENCES

- [1] Holland J., 1975, "Adaptation in Natural and artificial Systems", the university of Michigan.
- [2] JG Digalakis, KG Margaritis, 2002 "An experimental study of benchmarking functions for genetic algorithms",
- [3] International Journal of Computer Mathematics 79 (4), 403-416.
- [4] Jean-Michel Renders and Hugues Bersini, "Hybridizing genetic algorithms with hill-climbing methods for global optimization: two possible ways", 1994 IEEE.
- [5] T. Elmihoub, A. A. Hopgood, L. Nolle and A. Battersby, "Performance of Hybrid Genetic Algorithms Incorporating Local Search", 2004.
- [6] Natalio Krasnogor and Jim Smith, 2005 "A Tutorial for Competent Memetic Algorithms: Model, Taxonomy and Design Issues", ISSN : 1089-778X .IEEE
- [7] J. Digalakis and K. Margaritis, 2004, "Performance Comparison of Memetic Algorithms" Appl. Math. Comput
- [8] 158.
- [9] Milenic Mitchell, John H. Holland, 1994, "When will a genetic algorithm outperform Hill climbing".
- [10] Stephen M. Goldfeld, Richard E. Quandt and Hale F. Trotte, "Maximization by Quadratic Hill-Climbing"
- [11] Kurt A. Hacker, John Eddy and Kemper E. Lewis, 2002, "Efficient Global optimization using Hybrid Genetic
- [12] Algorithms", American Institute of Aeronautics and Astronautics, Inc.
- [13] Nicholas J. Radcliffe and Patrick D. Surry, "Formal Memetic Algorithms", in "Evolutionary Computing: AISB
- [14] Workshop", Ed: T.C. Fogarty, Springer-Verlag LNCS 865, pp1-16, 1994.
- [15] Tarek A. El-Mihoub, Adrian A. Hopgood, Lars Nolle, Alan Battersby, "Hybrid Genetic Algorithms: A Review", Engineering Letters, 13, ISSN: 1816-093X, 2006.
- [16] Aaquil Bunglowala, Dr. B. M. Singhi, 2008, "A Solution to combinatorial Optimization Problem using Memetic Algorithms", International Journal Of Computer Science and Applications Vol. 1, No. 3, ISSN 0974-1003.
- [17] H.G. Beyer, H.P. Schwefel, Evolution strategies, 2002, "A comprehensive introduction, Natural Computing"